

# Jacuzzi J-495

## Specifications

<b>Seating Capacity</b> .....	8-9 Adults
<b>Dimensions</b> .....	91" x 110" x 37.5" Front/43.5" Back, (231.1 cm x 279.4 cm x 95.25 cm Front/110.5 cm Back); <b>For complete dimensions, See page 101</b>
<b>Dry Weight</b> .....	1,091 lbs (495 kg)
<b>Filled Weight (Spa Volume)</b> .....	6,679 lbs (3,030 kg)
<b>Filled Weight (Average Fill)</b> .....	5,261 lbs (2,386 kg)
<b>Water Capacity (Spa Volume)</b> .....	670 US gallons (2,536 Liters)
<b>Water Capacity (Average Fill)</b> .....	500 US gallons (1,893 Liters)
<b>Electronic Controls</b> .....	ProTouch™ 2 LCD control panel, user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of pre-programmed filtration cycles, heating modes and water temperature setting.
<b>Pump 1</b> .....	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame <b>Export (50 Hz):..... 1-Speed, 2.0 HP continuous</b>
<b>Pump 2</b> .....	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame <b>Export (50 Hz):..... 1-Speed, 2.0 HP continuous</b>
<b>Pump 3</b> .....	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame <b>Export (50 Hz):..... 1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b> .....	Yes, 8-Hour
<b>Total PowerPro® Jets</b> .....	71
<b>Seat A Jets</b> .....	2 PowerPro® NX2, 2 PowerPro® FX, 5 PowerPro® RX
<b>Seat B Jets</b> .....	1 PowerPro® FX Large Rotational
<b>Seat C Jets</b> .....	2 PowerPro® NX2, 6 PowerPro® RX, 2 PowerPro® FX Directional, 2 PowerPro® PX, 4 PowerPro® FX
<b>Seat D Jets</b> .....	2 PowerPro® FX Large Rotational
<b>Seat E Jets</b> .....	2 PowerPro® NX2, 4 PowerPro® FX Rotational, 6 PowerPro® FX, 2 PowerPro® PX, 2 PowerPro® FX Directional
<b>Seat F Jets</b> .....	4 PowerPro® FX, 4 PowerPro® RX
<b>Seat G Jet</b> .....	2 PowerPro® NX2, 3 PowerPro® MX
<b>Footwell (H)</b> .....	14 PowerPro® FX Small
<b>Massage Selectors</b> .....	2
<b>Air Controls</b> .....	5
<b>Water Management System</b> .....	One ProClarity® 40 ft <sup>2</sup> filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft <sup>2</sup> filter; Floating Weir; Factory installed CLEARARRAY® Water Purification System <b>Export (50 Hz):..... Factory installed CLEARARRAY® Water Purification System</b>
<b>LED Lighting</b> .....	Waterfall light, massage selectors, cupholders, underwater, indicator light, and OPTIONAL exterior lights
<b>ProFinish™ Cabinet Colors</b> .....	Modern Hardwood, Brushed Gray, and Smoked Ebony
<b>Acrylic Colors</b> .....	Platinum, Silver Pearl (Gypsum), Sahara, Midnight, Monaco, Porcelain
<b>Headrests</b> .....	4
<b>Waterfalls</b> .....	Two with independent flow rate (on or off) adjustment; powered by 8-hour circulation pump
<b>Electrical Requirements:</b> .....	North America (60 Hz): 240 VAC@50A or 60A <b>Export (50 Hz): 230-240 VAC@ 1x32A, 1x40A, 1x32A/1x16A, 1x16A/1x16A/1x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b> .....	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features (Optional)</b> .....	SmartTub™ Module, Exterior lights
<b>Audio System (Optional)</b> .....	BLUEWAVE® Spa Stereo System with Bluetooth capability and Aux 3.5 mm headphone jack port; 4 premium speakers, a powered subwoofer




\*(See Warranty Document for Specific Details)


Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-495

## Operation/Seat Depths

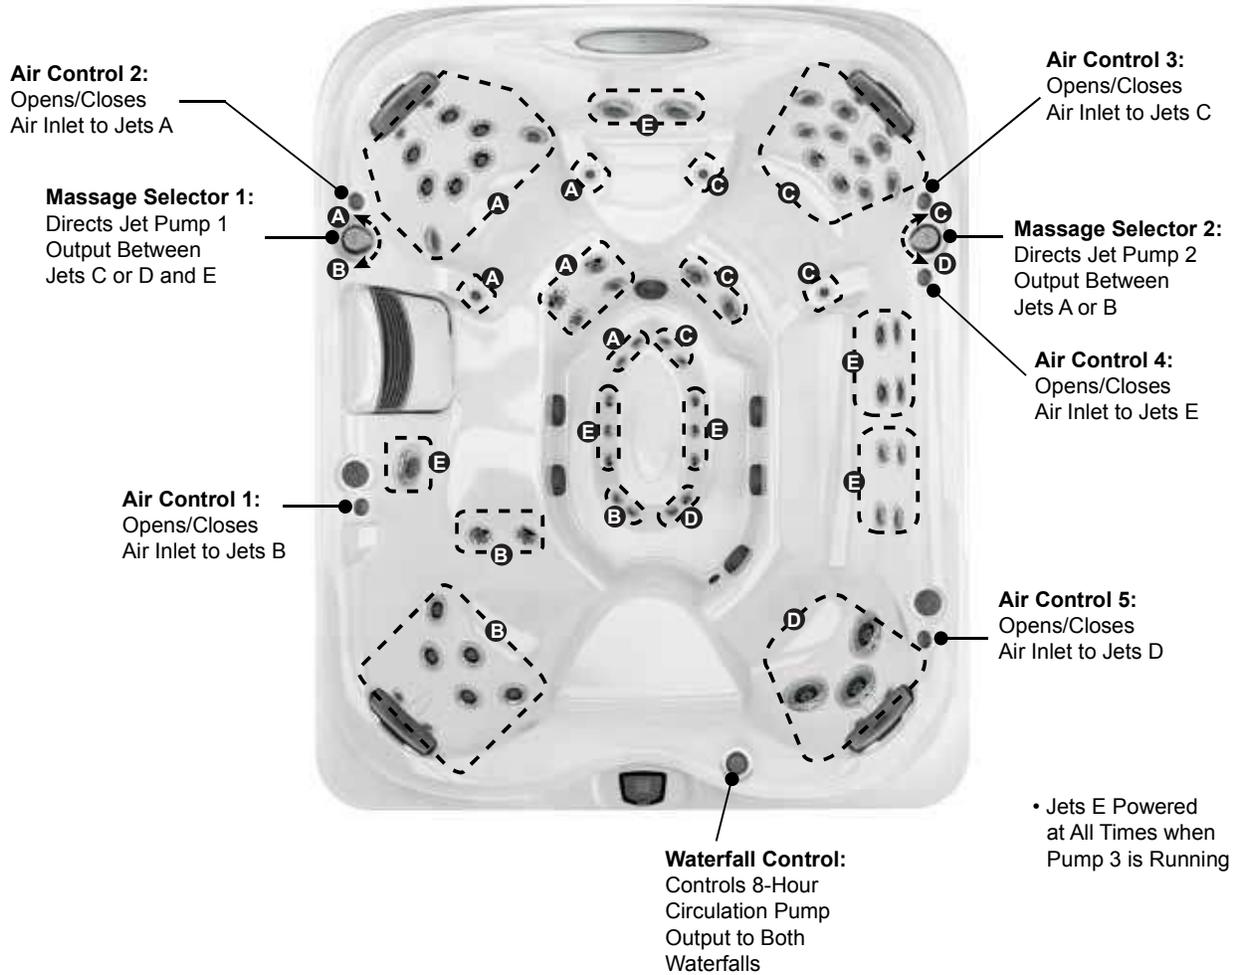

### 71 Total Jets

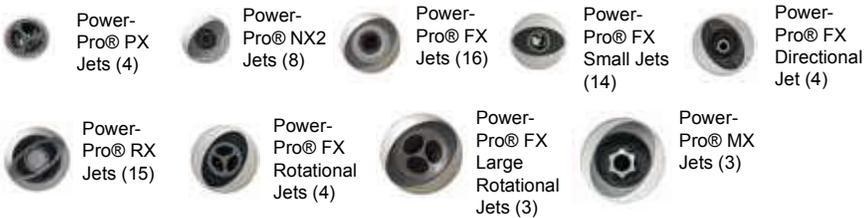



Spa Operation Subject to Change without Notice

## Seat Depths

- A = 27.75" (70.49 cm)**
- B = 18.75" (47.63 cm)**
- C = 29.00" (73.66 cm)**
- D = 19.00" (73.03 cm)**
- E = 27.00" (68.58 cm)**
- F = 23.00" (58.42 cm)**

- G = 25.50" (64.77 cm)**
- H = 17.75" (45.09 cm)**
- I = 30.75" (78.11 cm)**
- J = 33.00" (83.82 cm)**

Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance  $\pm 0.5"$  (1.27 cm).

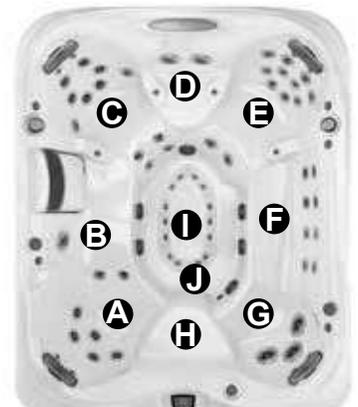


Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-495

## Dimensions


**TOP VIEW**

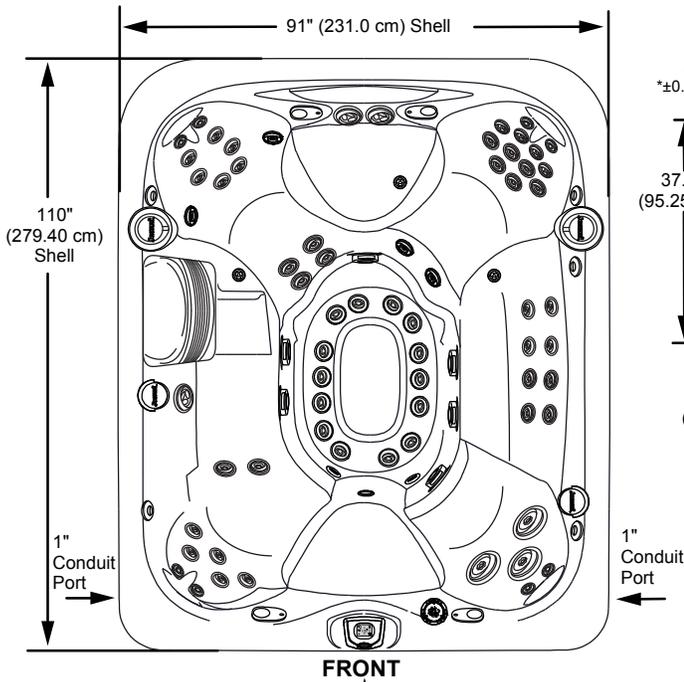

Equipment Bay/Pump Access  
CLEARRAY, Optional BLUEWAVE®,  
and Optional SmartTub System  
located behind the cabinet


**FRONT VIEW**

Tolerance:  $\pm 0.5"$  (1.27 cm)

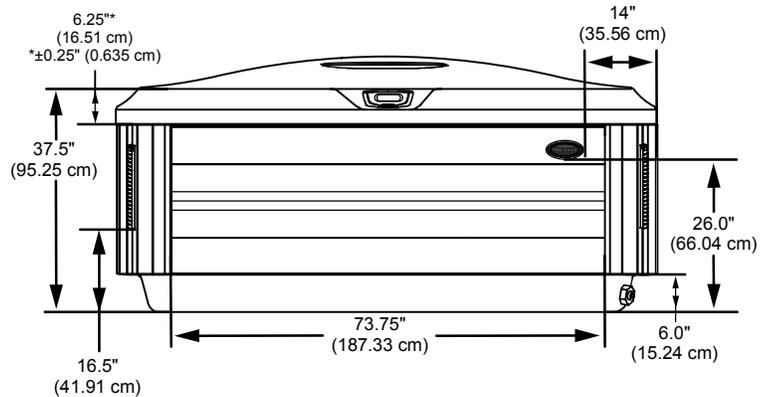


**RIGHT SIDE VIEW**

Tolerance:  $\pm 0.5"$  (1.27 cm)

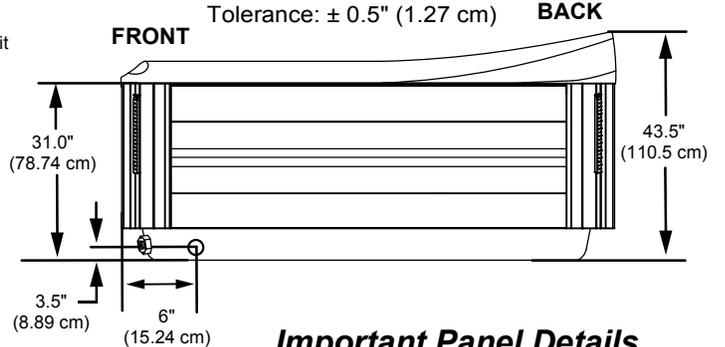

### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

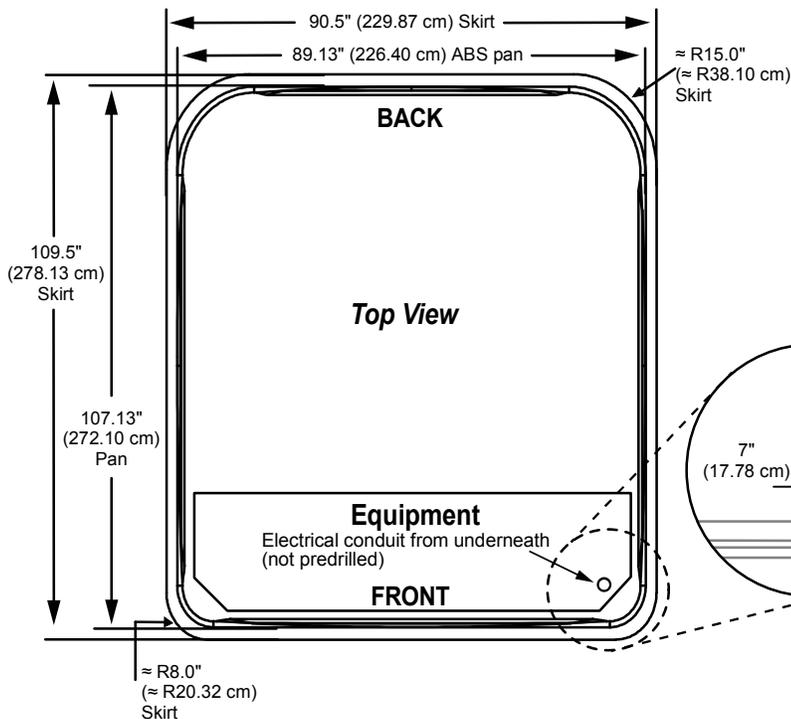

**IMPORTANT!** Always measure each hot tub for exact dimensions **BEFORE** designing its foundational support and/or decking.



Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Jacuzzi J-485

## Specifications

<b>Seating Capacity</b> .....	6-7 Adults
<b>Dimensions</b> .....	91" x 91" x 37.5" Front/43.5" Back, (231.14 cm x 231.14 cm x 95.25 cm Front/110.5 cm Back); <b>For complete dimensions, See page 101</b>
<b>Dry Weight</b> .....	916 lbs (415 kg)
<b>Filled Weight (Average Fill)</b> .....	4,544 lbs (2,061 kg)
<b>Water Capacity (Average Fill)</b> .....	435 US gallons (1,647 Liters)
<b>Filled Weight (Spa Volume)</b> .....	5,336 lbs (2,421 kg)
<b>Water Capacity (Spa Volume)</b> .....	530 US gallons (2,006 Liters)
<b>Electronic Controls</b> .....	ProTouch™ 2 LCD control panel, user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of pre-programmed filtration cycles, heating modes and water temperature setting.
<b>Pump 1</b> .....	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
<b>Export (50 Hz):</b> .....	<b>1-Speed, 2.0 HP continuous</b>
<b>Pump 2</b> .....	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
<b>Export (50 Hz):</b> .....	<b>1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b> .....	Yes, 8-Hour
<b>Total PowerPro® Jets</b> .....	49
<b>Seat A Jets</b> .....	2 PowerPro® NX2, 3 PowerPro® MX
<b>Seat B Jets</b> .....	2 PowerPro® NX2, 6 PowerPro® RX
<b>Seat C Jets</b> .....	2 PowerPro® FX Large
<b>Seat D Jets</b> .....	2 PowerPro® NX2, 4 PowerPro® FX Rotational, 6 PowerPro® FX, 2 PowerPro® PX
<b>Seat E Jets</b> .....	2 PowerPro® RX, 2 PowerPro® FX
<b>Seat F Jets</b> .....	4 PowerPro® FX, 1 PowerPro® FX Large Rotational, 2 PowerPro® FX Rotational
<b>Footwell (G)</b> .....	8 PowerPro® FX Small, 1 PowerPro® FX Large
<b>Massage Selectors</b> .....	2
<b>Air Controls</b> .....	4, On/Off rocker switch, air controller
<b>Water Management System</b> .....	One ProClarity® 40 ft <sup>3</sup> filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft <sup>3</sup> filter; Floating Weir; Factory installed CLEARARRAY® Water Purification System
<b>Export (50 Hz):</b> .....	<b>Factory installed CLEARARRAY® Water Purification System</b>
<b>LED Lighting</b> .....	Waterfall light, massage selectors, cupholders, underwater, indicator light, and OPTIONAL exterior lights
<b>ProFinish™ Cabinet Colors</b> .....	Modern Hardwood, Brushed Gray, and Smoked Ebony
<b>Acrylic Colors</b> .....	Platinum, Silver Pearl (Gypsum), Midnight, Monaco, Porcelain, Sahara, Sandstone
<b>Headrests</b> .....	4
<b>Waterfall</b> .....	One with independent flow rate (on or off) adjustment; powered by 8-hour circulation pump
<b>Electrical Requirements:</b> .....	North America (60 Hz): 240 VAC@40A, 50A, or 60A <b>Export (50 Hz): 230-240 VAC@ 1x32A, 1x20A/1x16A, 1x16A/1x16A/1x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b> .....	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features (Optional)</b> .....	SmartTub™ Module, Exterior lights
<b>Audio System (Optional)</b> .....	BLUEWAVE® Spa Stereo System with Bluetooth capability and Aux 3.5 mm headphone jack port; 4 premium speakers, a powered subwoofer




\*(See Warranty Document for Specific Details)


Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-485

## Operation/Seat Depths

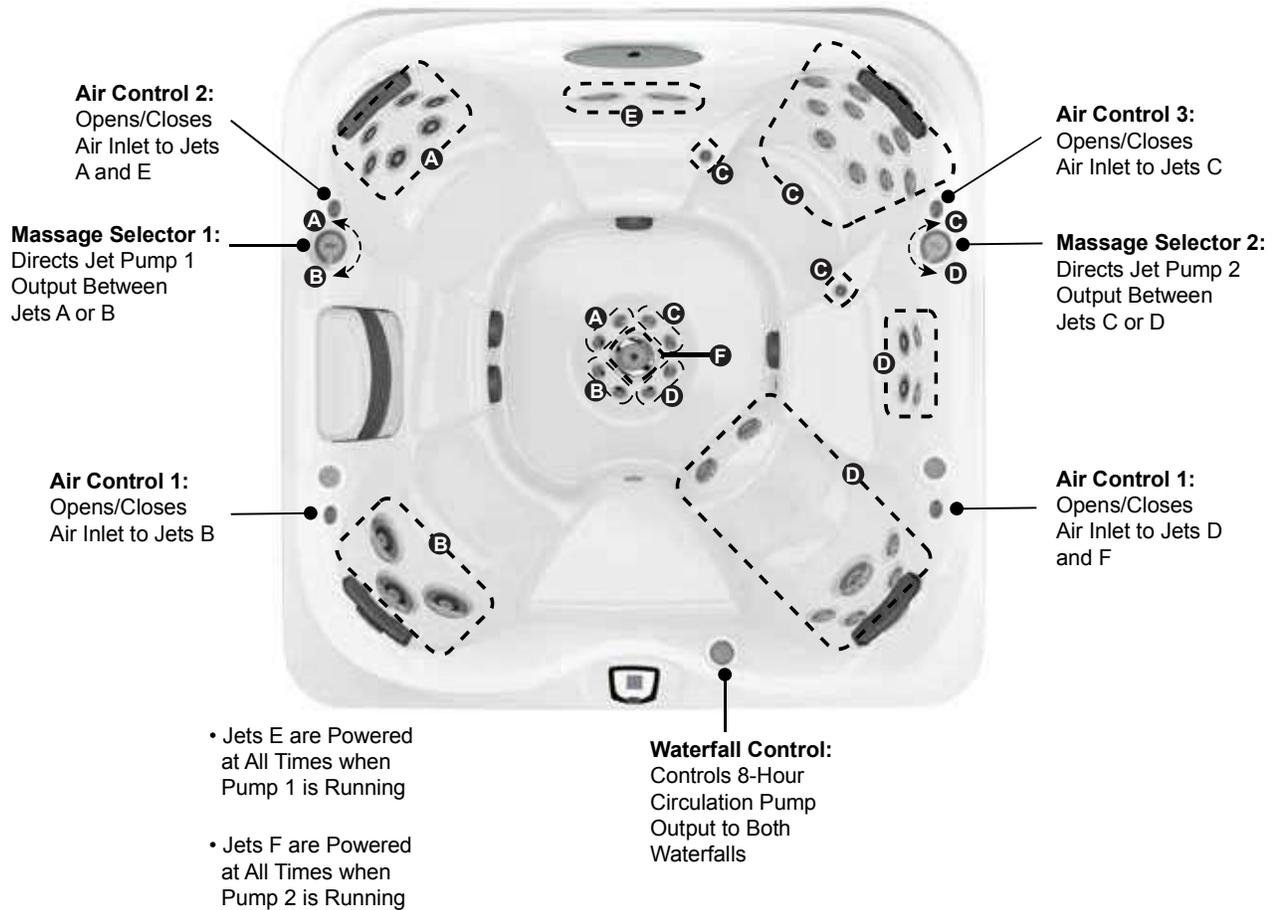

### 49 Total Jets

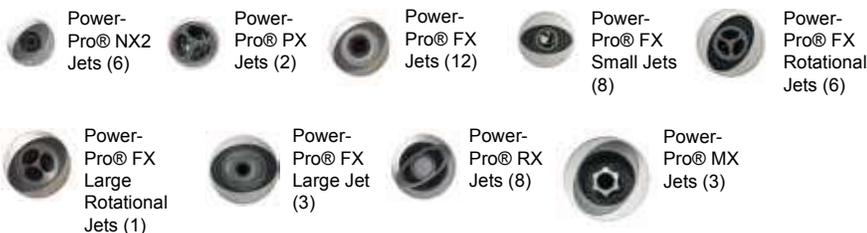


Spa Operation Subject to Change without Notice

## Seat Depths

**A = 25.25" (64.14 cm)**  
**B = 23.00" (58.42 cm)**  
**C = 29.50" (74.93 cm)**  
**D = 23.25" (59.06 cm)**  
**E = 29.25" (74.30 cm)**  
**F = 21.00" (53.34 cm)**

**G = 27.38" (69.55 cm)**  
**H = 17.25" (43.82 cm)**  
**I = 32.50" (82.55 cm)**



Listed dimensions represent distance from top of acrylic to lowest point in seat.  
**Tolerance ± 0.5" (1.27 cm).**




Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-485

## Dimensions

TOP VIEW

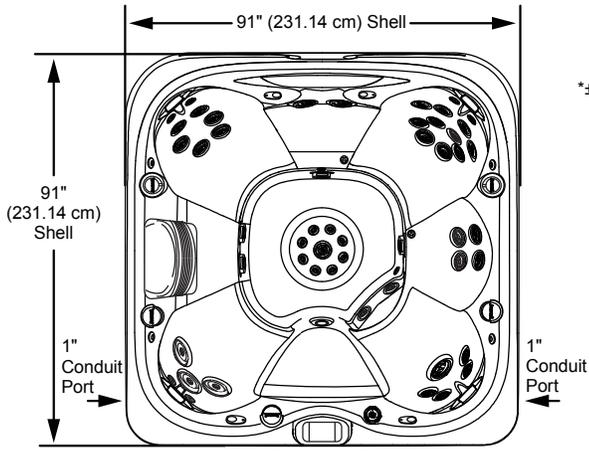


FRONT

Equipment Bay/Pump Access  
CLEARARRAY, Optional BLUEWAVE®,  
and Optional SmartTub System  
located behind the cabinet

FRONT VIEW


Tolerance:  $\pm 0.5"$  (1.27 cm)

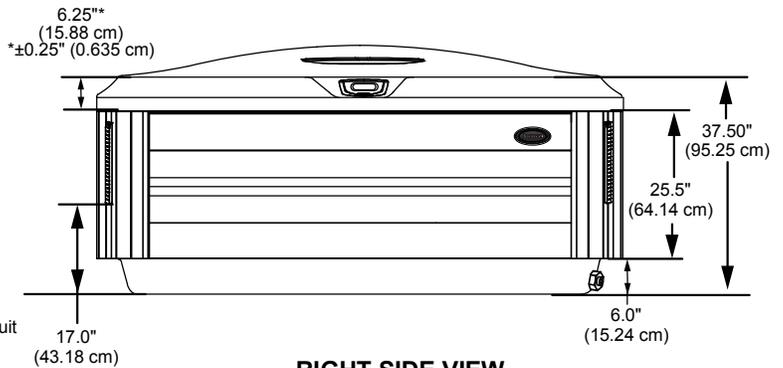

RIGHT SIDE VIEW

Tolerance:  $\pm 0.5"$  (1.27 cm)

BACK

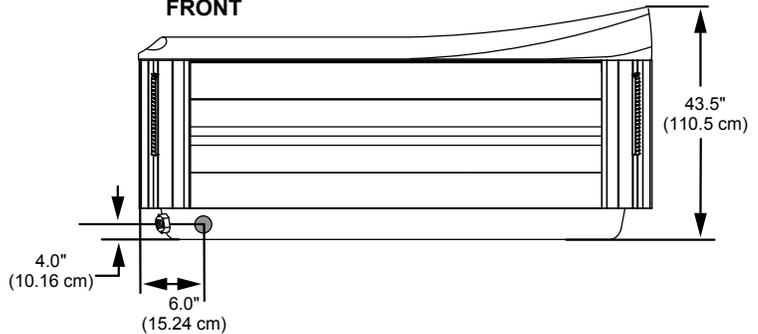


### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.



**IMPORTANT!** Always measure each hot tub for exact dimensions **BEFORE** designing its foundational support and/or decking.

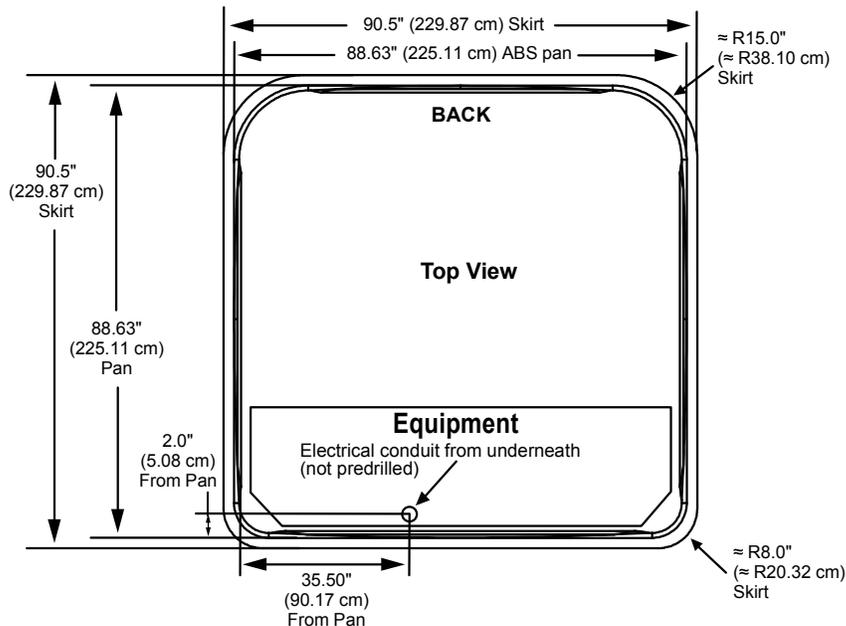


Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Jacuzzi J-475

## Specifications

<b>Seating Capacity</b> .....	6-7 Adults
<b>Dimensions</b> .....	91" x 91" x 37.5" Front/43.5" Back, (231.14 cm x 231.14 cm x 95.25 cm Front/110.49 cm Back); <b>For Complete Dimensions, See page 101</b>
<b>Dry Weight</b> .....	925 lbs (419.5 kg)
<b>Filled Weight (Average Fill)</b> .....	4,595 lbs (2,084 kg)
<b>Water Capacity (Average Fill)</b> .....	440 US gallons (1,666 Liters)
<b>Filled Weight (Spa Volume)</b> .....	5,387 lbs (2,444 kg)
<b>Water Capacity (Spa Volume)</b> .....	535 US gallons (2,025 Liters)
<b>Electronic Controls</b> .....	ProTouch™ 2 LCD control panel, user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of pre-programmed filtration cycles, heating modes and water temperature setting.
<b>Pump 1</b> .....	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
<b>Export (50 Hz):</b> .....	<b>1-Speed, 2.0 HP continuous</b>
<b>Pump 2</b> .....	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
<b>Export (50 Hz):</b> .....	<b>1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b> .....	Yes, 8-Hour
<b>Total PowerPro® Jets</b> .....	55
<b>Seat A Jets</b> .....	2 PowerPro® NX2, 3 PowerPro® MX, 2 PowerPro® FX Rotational
<b>Seat B Jets</b> .....	2 PowerPro® NX2, 6 PowerPro® FX Rotational, 6 PowerPro® FX
<b>Seat C Jets</b> .....	2 PowerPro® FX Large
<b>Seat D Jets</b> .....	2 PowerPro® NX2, 6 PowerPro® RX, 8 PowerPro® PX, 2 PowerPro® FX Large
<b>Seat E Jet</b> .....	4 PowerPro® FX, 1 PowerPro® FX Large Rotational
<b>Footwell (F)</b> .....	8 PowerPro® FX Small, 1 PowerPro® FX Large
<b>Massage Selectors</b> .....	2
<b>Air Controls</b> .....	4, On/Off rocker switch air controller
<b>Water Management System</b> .....	One ProClarity® 40 ft <sup>2</sup> filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft <sup>2</sup> filter; Floating Weir; Factory installed CLEARRAY® Water Purification System
<b>Export (50 Hz):</b> .....	<b>Factory installed CLEARRAY® Water Purification System</b>
<b>LED Lighting</b> .....	Waterfall light, massage selectors, cupholders, underwater, indicator light, and OPTIONAL exterior lights
<b>ProFinish™ Cabinet Colors</b> .....	Modern Hardwood, Brushed Gray, and Smoked Ebony
<b>Acrylic Colors</b> .....	Platinum, Silver Pearl (Gypsum), Monaco, Midnight, Sahara, Porcelain
<b>Headrests</b> .....	4
<b>Waterfall</b> .....	One with independent flow rate (on or off) adjustment; powered by 8-hour circulation pump
<b>Electrical Requirements:</b> .....	North America (60 Hz): 240 VAC@40A, 50A, or 60A <b>Export (50 Hz): 230-240 VAC@ 1x32A, 1x20A/1x16A, 1x16A/1x16A/1x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b> .....	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features (Optional)</b> .....	SmartTub™ Module, Exterior lights
<b>Audio System (Optional)</b> .....	BLUEWAVE® Spa Stereo System with Bluetooth capability and Aux 3.5 mm headphone jack port; 4 premium speakers, a powered subwoofer

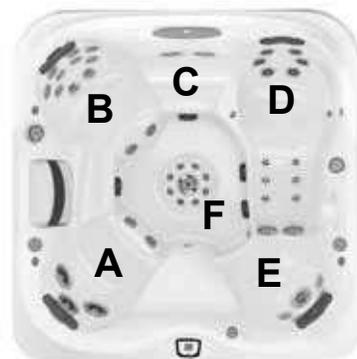


\*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-475

## Operation/Seat Depths

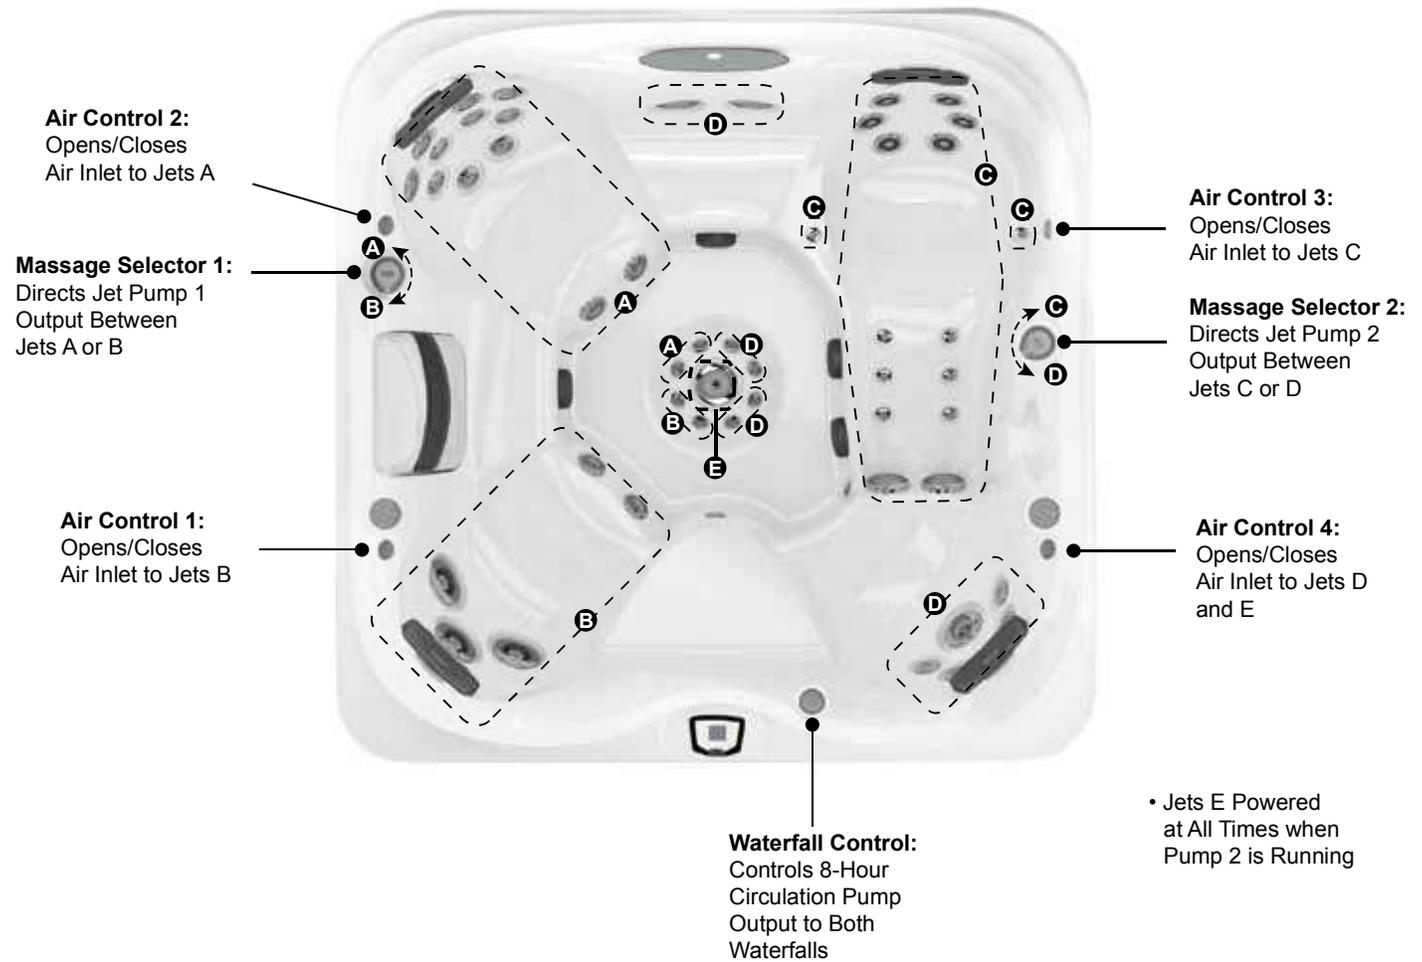

### 55 Total Jets




Spa Operation Subject to Change without Notice

## Seat Depths

- A = 25.25" (64.14 cm)**
- B = 23.00" (58.42 cm)**
- C = 29.50" (74.93 cm)**
- D = 23.25" (59.06 cm)**
- E = 29.25" (74.30 cm)**
- F = 25.25" (64.14 cm)**

- G = 17.25" (43.82 cm)**
- H = 32.50" (82.55 cm)**
- I = 19.75" (50.17 cm)**
- J = 28.50" (72.39 cm)**






Listed dimensions represent distance from top of acrylic to lowest point in seat.  
**Tolerance ± 0.5" (1.27 cm).**



Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-475

## Dimensions

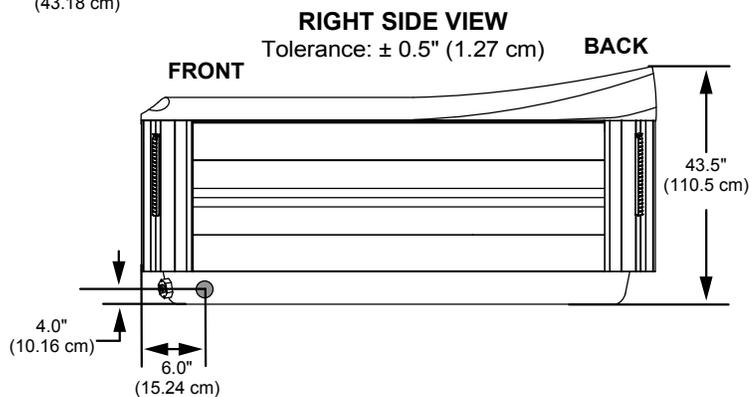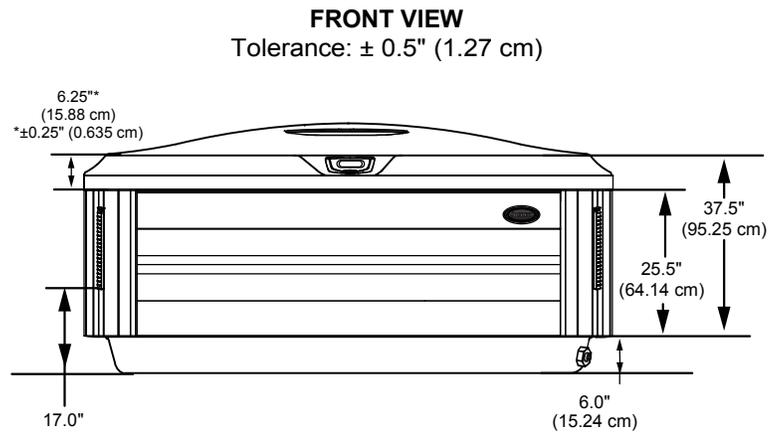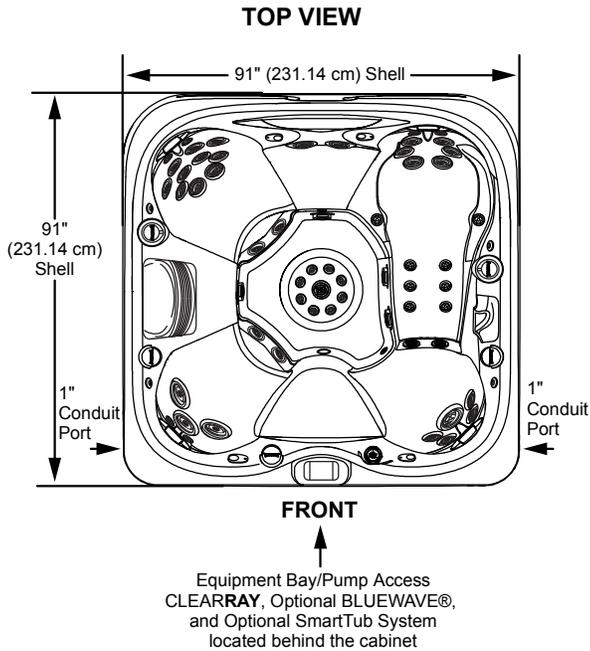


### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.



**IMPORTANT!** Always measure each hot tub for exact dimensions **BEFORE** designing its foundational support and/or decking.

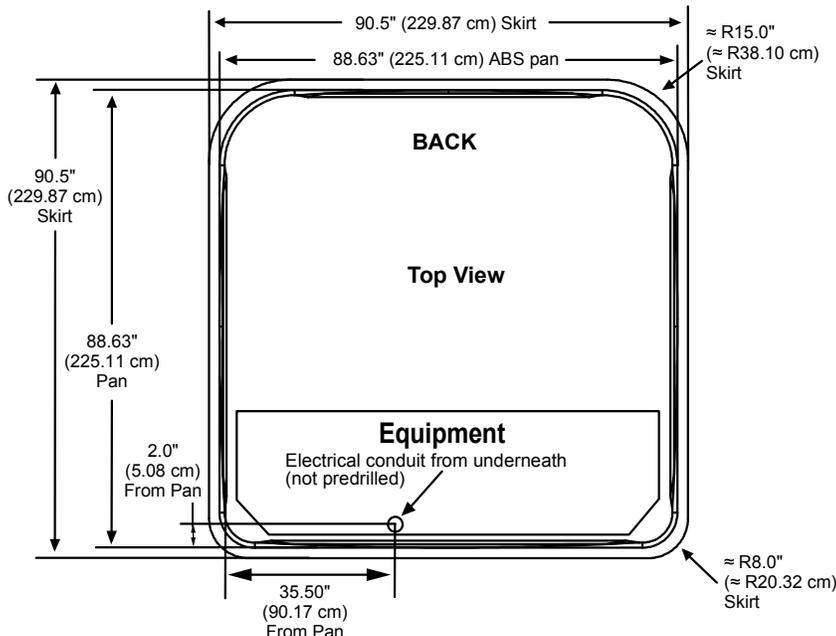


Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Jacuzzi J-445

## Specifications

<b>Seating Capacity</b> .....	6 Adults
<b>Dimensions</b> .....	84" x 84" x 37.5" Front/43.5" Back, (213.5 cm x 213.5 cm x 95.25 cm Front/110.5 cm Back); <b>For Complete Dimensions, See page 101</b>
<b>Dry Weight</b> .....	855 lbs (388 kg)
<b>Filled Weight (Average Fill)</b> .....	4,024 lbs (1,825 kg)
<b>Water Capacity (Average Fill)</b> .....	380 US gallons (1,438 Liters)
<b>Filled Weight (Spa Volume)</b> .....	4,525 lbs (2,052 kg)
<b>Water Capacity (Spa Volume)</b> .....	440 US gallons (1,666 Liters)
<b>Electronic Controls</b> .....	ProTouch™ 2 LCD control panel, user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of pre-programmed filtration cycles, heating modes and water temperature setting.
<b>Pump 1</b> .....	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 1-Speed, 2.0 HP continuous</b>
<b>Pump 2</b> .....	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b> .....	Yes, 8-Hour
<b>Total PowerPro® Jets</b> .....	45
<b>Seat A Jets</b> .....	2 PowerPro® NX2, 3 PowerPro® MX
<b>Seat B Jets</b> .....	2 PowerPro® RX
<b>Seat C Jets</b> .....	2 PowerPro® FX, 6 PowerPro® RX, 2 PowerPro® FX Rotational
<b>Seat D Jets</b> .....	1 PowerPro® FX Large Rotational
<b>Seat E Jets</b> .....	2 PowerPro® NX2, 4 PowerPro® FX Rotational, 6 PowerPro® FX
<b>Seat F Jets</b> .....	4 PowerPro® FX, 1 PowerPro® FX Large Rotational, 2 PowerPro® FX Rotational
<b>Footwell (G)</b> .....	8 PowerPro® FX Small
<b>Massage Selectors</b> .....	2
<b>Air Controls</b> .....	4, On/Off rocker switch <sub>2</sub> air controller
<b>Water Management System</b> .....	One ProClarity® 40 ft <sup>2</sup> filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft <sup>2</sup> filter; Floating Weir; Factory installed CLEARRAY® Water Purification System <b>Export (50 Hz): Factory installed CLEARRAY® Water Purification System</b>
<b>LED Lighting</b> .....	One waterfall with light, one underwater light, cupholders, massage selector lights, indicator light, and OPTIONAL exterior lights
<b>ProFinish™ Cabinet Colors</b> .....	Modern Hardwood, Brushed Gray, and Smoked Ebony
<b>Acrylic Colors</b> .....	Platinum, Silver Pearl, Monaco, Midnight, Sahara, Porcelain
<b>Headrests</b> .....	4
<b>Waterfall</b> .....	One with Independent flow rate (on or off) adjustment; powered by 8-hour circulation pump
<b>Electrical Requirements:</b> .....	North America (60 Hz): 240 VAC@40A, 50A, or 60A <b>Export (50 Hz): 230-240 VAC@ 1x32A, 1x20A/1x16A, or 1x16A/1x16A/1x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b> .....	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features (Optional)</b> .....	SmartTub™ Module, Exterior lights
<b>Audio System (Optional)</b> .....	BLUEWAVE® Spa Stereo System with Bluetooth capability and Aux 3.5 mm head-phone jack port; 4 premium speakers, a powered subwoofer




\*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-445

## Operation/Seat Depths

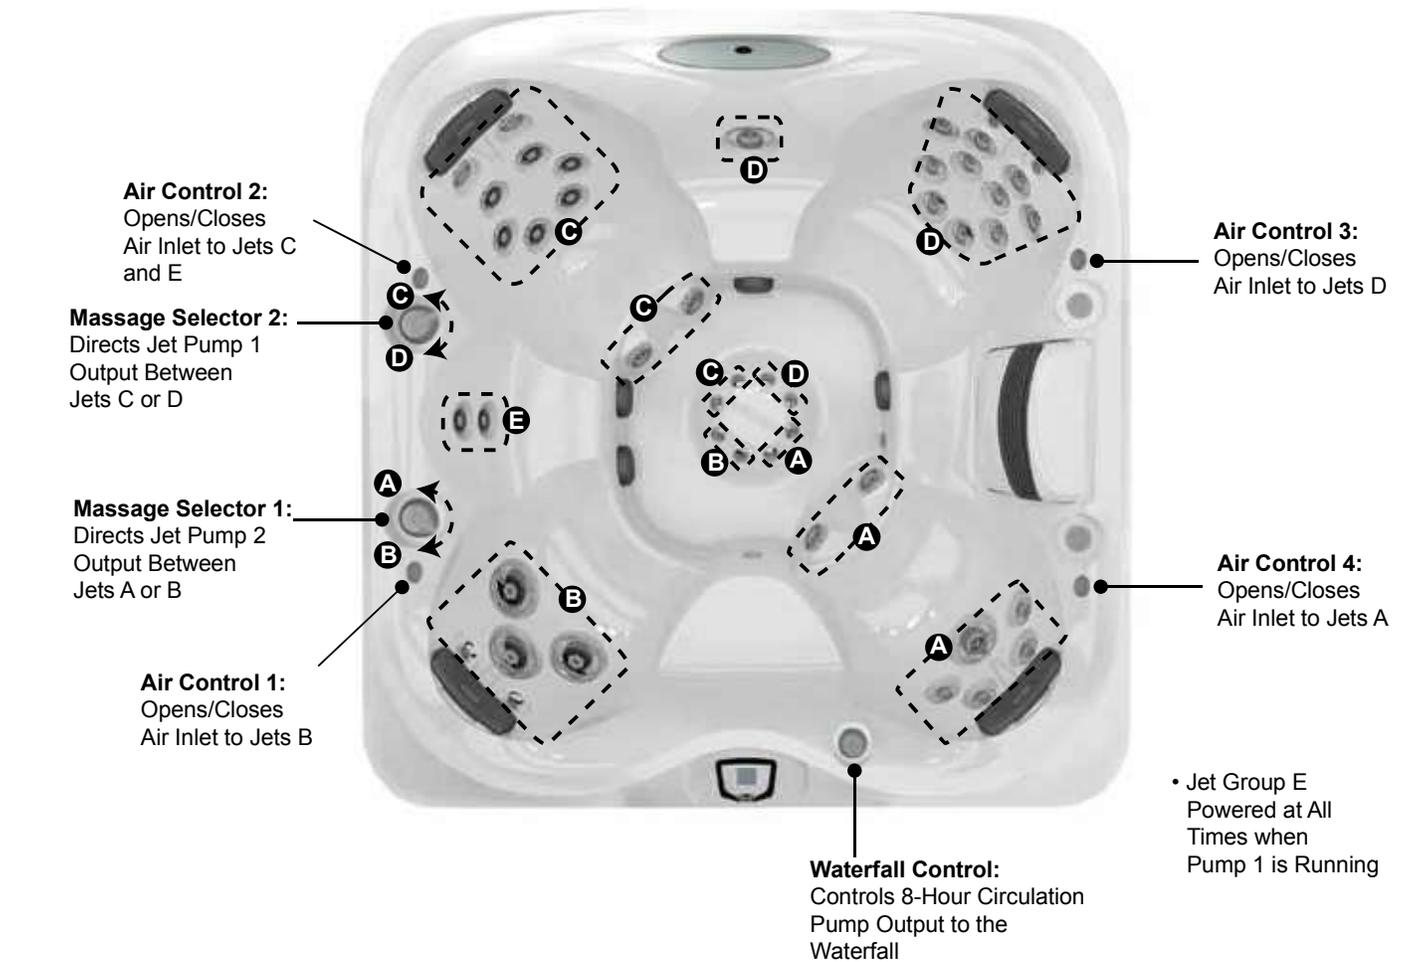

### 45 Total Jets




Spa Operation Subject to Change without Notice

## Seat Depths

- A = 25.50" (64.77 cm)**
- B = 21.00" (53.34 cm)**
- C = 30.00" (76.20 cm)**
- D = 23.00" (58.42 cm)**
- E = 29.00" (73.66 cm)**
- F = 23.00" (58.42 cm)**

- G = 25.50" (64.77 cm)**
- H = 18.00" (45.72 cm)**
- I = 34.00" (86.36 cm)**



Front Back


Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance  $\pm 0.5"$  (1.27 cm).




Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-445

## Dimensions

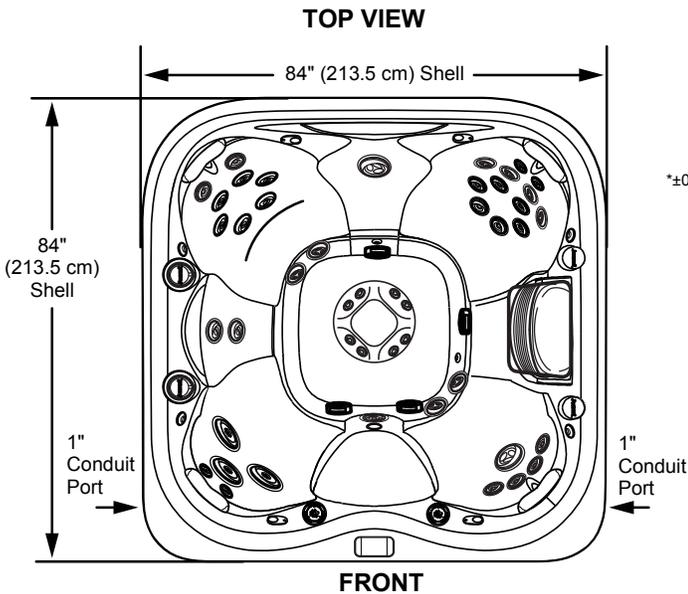


**FRONT VIEW**  
Tolerance:  $\pm 0.5"$  (1.27 cm)

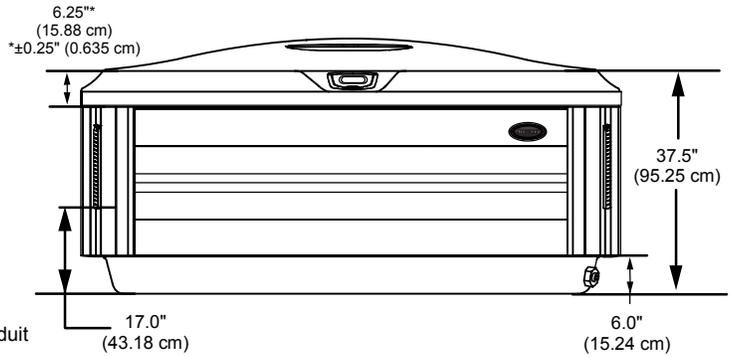

Equipment Bay/Pump Access  
CLEARRAY, Optional BLUEWAVE®,  
and Optional SmartTub System  
located behind the cabinet

**RIGHT SIDE VIEW**  
Tolerance:  $\pm 0.5"$  (1.27 cm)

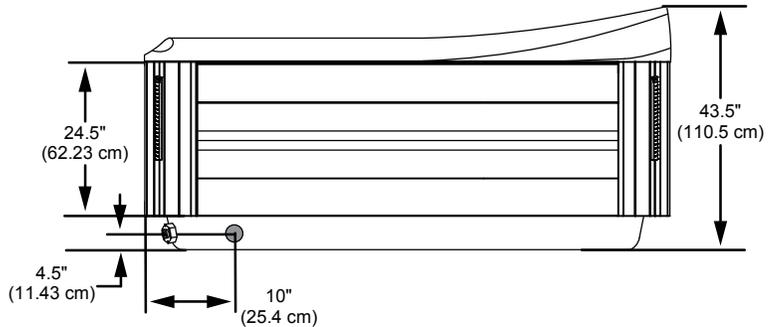


### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.



**IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.**

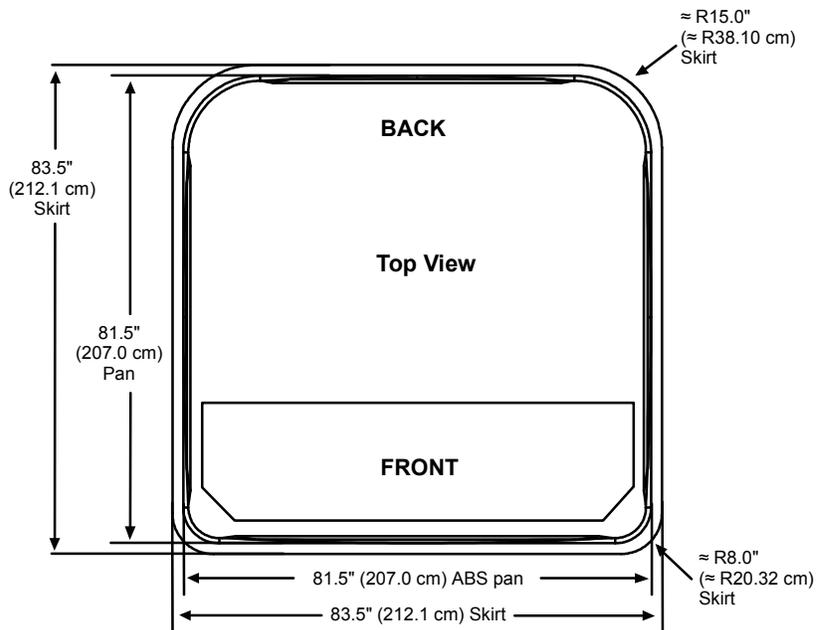

Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Jacuzzi J-435

## Specifications

<b>Seating Capacity</b> .....	5-6 Adults
<b>Dimensions</b> .....	84" x 84" x 37.5" Front/43.5" Back, (213.5 cm x 213.5 cm x 95.25 cm Front/110.5 cm Back); <b>For Complete Dimensions, See page 101</b>
<b>Dry Weight</b> .....	822 lbs (373 kg)
<b>Filled Weight (Average Fill)</b> .....	3,824 lbs (1,735 kg)
<b>Water Capacity (Average Fill)</b> .....	360 US gallons (1,363 Liters)
<b>Filled Weight (Spa Volume)</b> .....	4,492 lbs (2,037 kg)
<b>Water Capacity (Spa Volume)</b> .....	440 US gallons (1,666 Liters)
<b>Electronic Controls</b> .....	ProTouch™ 2 LCD control panel, user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of pre-programmed filtration cycles, heating modes and water temperature setting.
<b>Pump 1</b> .....	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 1-Speed, 2.0 HP continuous</b>
<b>Pump 2</b> .....	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b> .....	Yes, 8-Hour
<b>Total PowerPro® Jets</b> .....	47
<b>Seat A Jets</b> .....	3 PowerPro® FX
<b>Seat B Jets</b> .....	2 PowerPro® NX2, 6 PowerPro® RX, 2 PowerPro® PX, 6 PowerPro® FX Small, 2 PowerPro® FX Rotational
<b>Seat C Jets</b> .....	1 PowerPro® FX Large Rotational
<b>Seat D Jets</b> .....	2 PowerPro® NX2, 4 PowerPro® FX Rotational, 6 PowerPro® FX
<b>Seat E Jets</b> .....	2 PowerPro® RX
<b>Seat F Jets</b> .....	2 PowerPro® NX2, 3 PowerPro® MX, 2 PowerPro® FX Rotational
<b>Footwell (G)</b> .....	4 PowerPro® FX Small
<b>Massage Selectors</b> .....	2
<b>Air Controls</b> .....	3, On/Off rocker switch air controller
<b>Water Management System</b> .....	One ProClarity® 40 ft <sup>2</sup> filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft filter; Floating Weir; Factory installed CLEARRAY® Water Purification System <b>Export (50 Hz): Factory installed CLEARRAY® Water Purification System</b>
<b>LED Lighting</b> .....	One waterfall with light, one underwater light, cupholder, massage selector lights, indicator light, and OPTIONAL exterior lights
<b>ProFinish™ Cabinet Colors</b> .....	Modern Hardwood, Brushed Gray, and Smoked Ebony
<b>Acrylic Colors</b> .....	Platinum, Silver Pearl, Sahara, Monaco, Midnight, Porcelain
<b>Headrests</b> .....	3
<b>Waterfall</b> .....	One with Independent flow rate (on or off) adjustment; powered by 8-hour circulation pump
<b>Electrical Requirements:</b> .....	North America (60 Hz): 240 VAC@40A, 50A, or 60A <b>Export (50 Hz): 230-240 VAC@ 1x32A, 1x20A/1x16A, or 1x16A/1x16A/1x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b> .....	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features (Optional)</b> .....	SmartTub™ Module, Exterior lights
<b>Audio System (Optional)</b> .....	BLUEWAVE® Spa Stereo System with Bluetooth capability and Aux 3.5 mm head-phone jack port; 4 premium speakers, a powered subwoofer




\*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-435

## Operation/Seat Depths

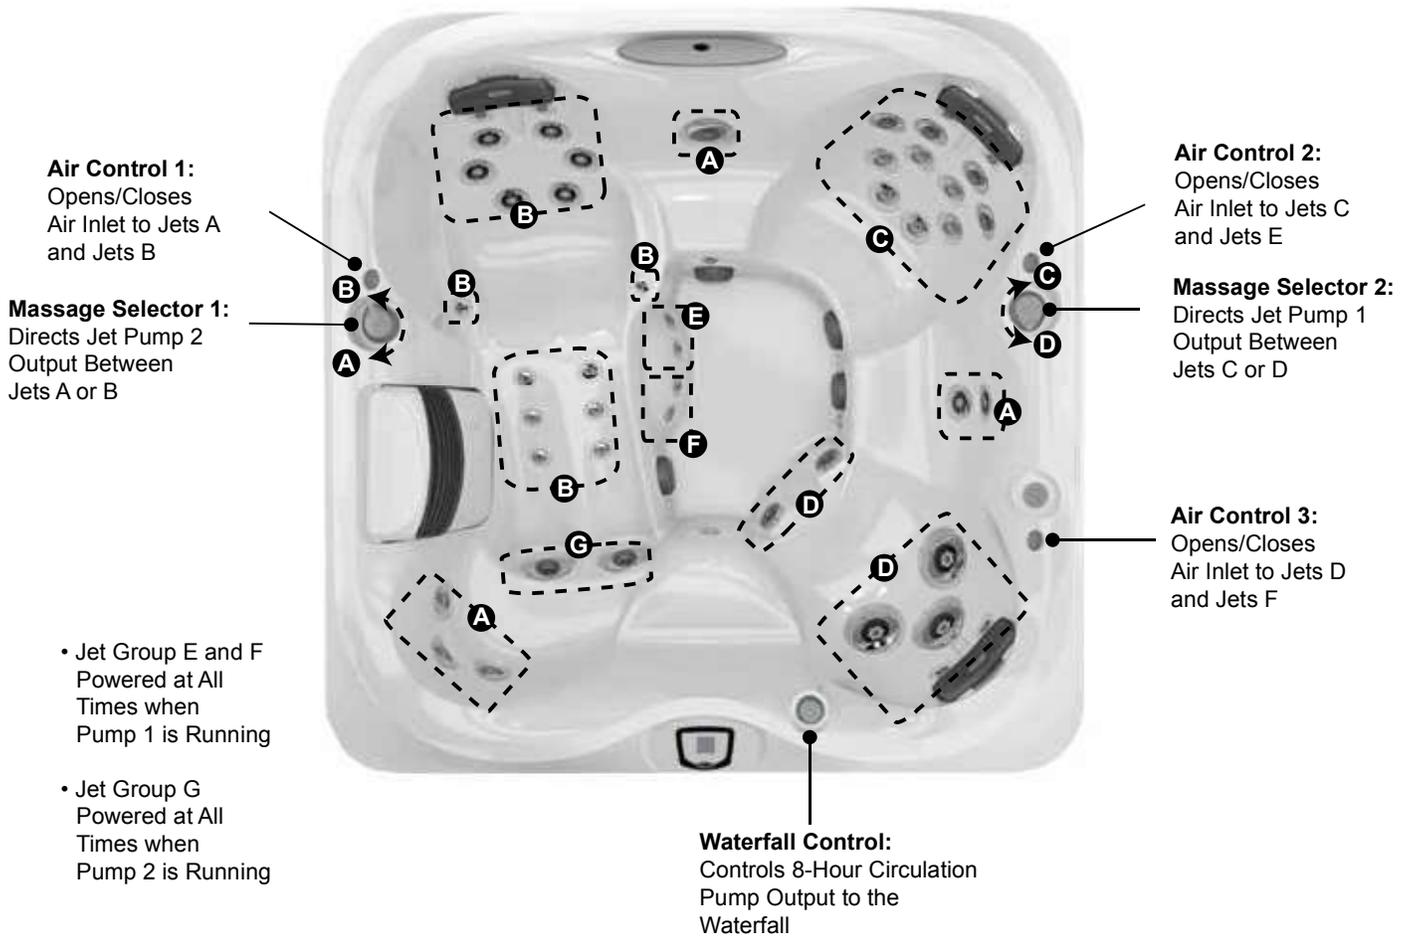

### 47 Total Jets




Spa Operation Subject to Change without Notice

## Seat Depths

- A = 17.75" (45.09 cm)**
- B = 27.75" (70.49 cm)**
- C = 29.00" (73.66 cm)**
- D = 23.00" (58.42 cm)**
- E = 30.00" (76.20 cm)**
- F = 23.50" (59.69 cm)**

- G = 25.50" (64.77 cm)**
- H = 33.50" (85.09 cm)**
- I = 20.50" (52.07 cm)**



Front Back


Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance  $\pm 0.5"$  (1.27 cm).



Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-435

## Dimensions

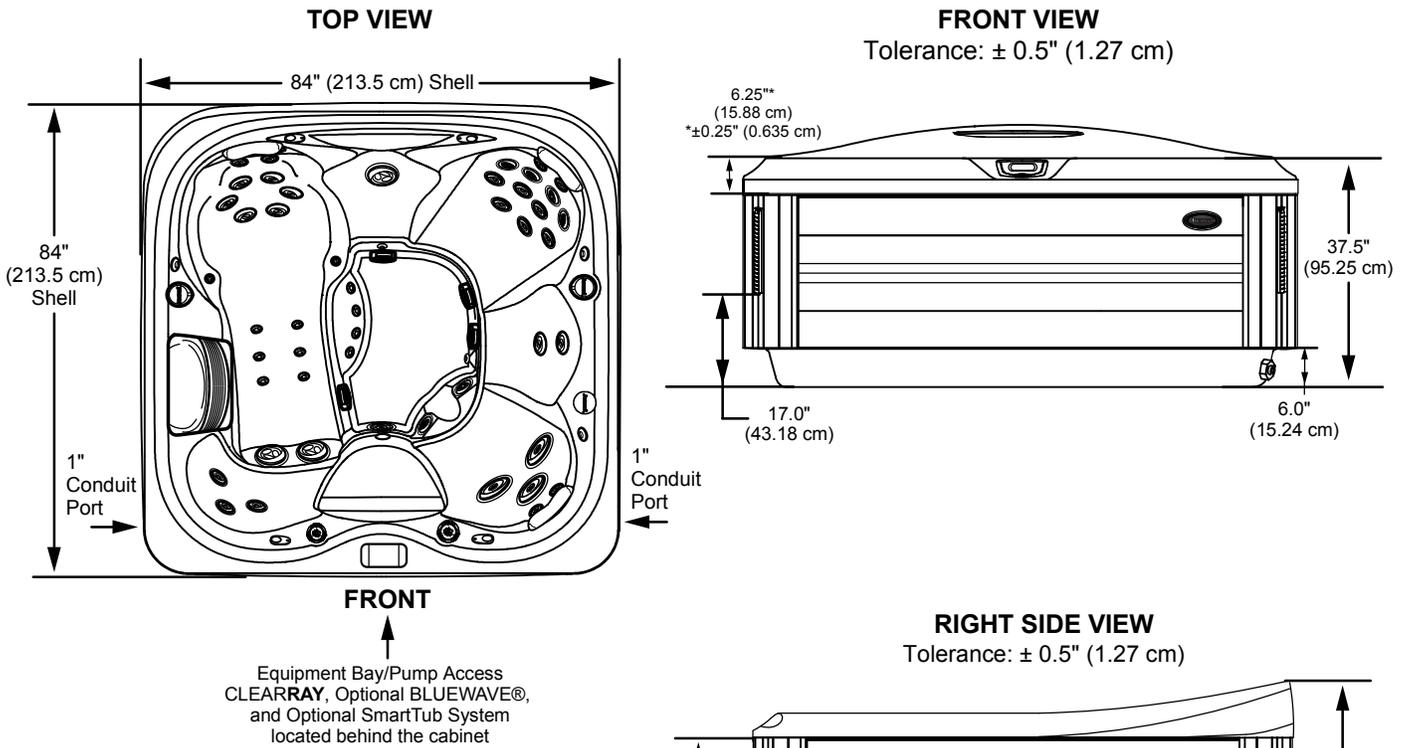


### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.



**IMPORTANT!** Always measure each hot tub for exact dimensions **BEFORE** designing its foundational support and/or decking.

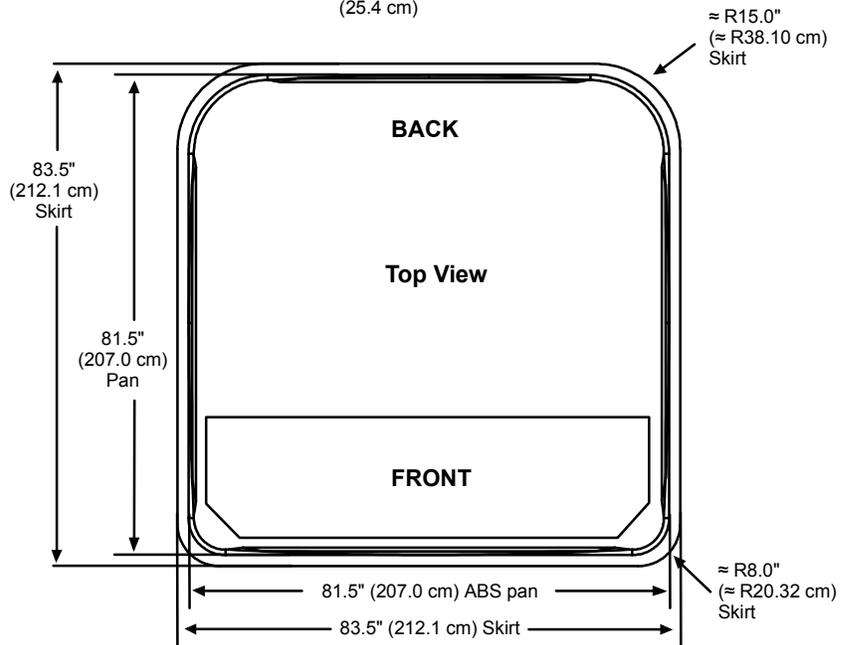


Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Jacuzzi J-425

## Specifications

<b>Seating Capacity</b> .....	4-5 Adults
<b>Dimensions</b> .....	76" x 87" x 34" Front/40" Back, (193.04 cm x 220.98 cm x 86.36 cm Front/101.60 cm Back); <b>For Complete Dimensions, See page 101</b>
<b>Dry Weight</b> .....	776 lbs (352 kg)
<b>Filled Weight (Spa Volume)</b> .....	4,279 lbs (1,941 kg)
<b>Filled Weight (Average Fill)</b> .....	3,445 lbs (1,563 kg)
<b>Water Capacity (Spa Volume)</b> .....	420 US gallons (1,590 Liters)
<b>Water Capacity (Average Fill)</b> .....	320 US gallons (1,211 Liters)
<b>Electronic Controls</b> .....	ProTouch™ LCD control panel, user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of pre-programmed filtration cycles, heating modes and water temperature setting.
<b>Pump 1</b> .....	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
<b>Export (50 Hz):</b> .....	<b>1-Speed, 2.0 HP continuous</b>
<b>Pump 2</b> .....	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
<b>Export (50 Hz):</b> .....	<b>1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b> .....	Yes, 8-Hour
<b>Total PowerPro® Jets</b> .....	35
<b>Seat A Jets</b> .....	2 PowerPro® NX2, 4 PowerPro® RX, 1 PowerPro® FX Large, 2 PowerPro® FX Rotational, 2 PowerPro® FX, 2 PowerPro® PX
<b>Seat B Jets</b> .....	4 PowerPro® FX, 1 PowerPro® FX Large Rotational
<b>Seat C Jets</b> .....	1 PowerPro® FX Large Rotational
<b>Seat D Jets</b> .....	2 PowerPro® FX Rotational, 6 PowerPro® FX
<b>Seat E Jets</b> .....	3 PowerPro® MX, 2 PowerPro® PX
<b>Footwell (F)</b> .....	3 PowerPro® FX
<b>Massage Selectors</b> .....	1
<b>Air Controls</b> .....	4
<b>Water Management System</b> .....	One ProClarity® 40 ft <sup>2</sup> filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft <sup>2</sup> filter; Floating Weir; Factory installed CLEARARRAY® Water Purification System
<b>Export (50 Hz):</b> .....	<b>Factory installed CLEARARRAY® Water Purification System</b>
<b>LED Lighting</b> .....	One waterfall with light, underwater light, cupholder, massage selector, indicator light, and OPTIONAL exterior lights
<b>ProFinish™ Cabinet Colors</b> .....	Modern Hardwood, Brushed Gray, and Smoked Ebony
<b>Acrylic Colors</b> .....	Platinum, Silver Pearl (Gypsum), Monaco, Midnight, Sahara, Porcelain
<b>Headrests</b> .....	4
<b>Waterfalls</b> .....	One independent flow rate (on or off) adjustment; powered by 8-hour circulation pump
<b>Electrical Requirements:</b> .....	North America (60 Hz): 240 VAC@40A, 50A, or 60A <b>Export (50 Hz): 230-240 VAC@ 1x32A, 1x20A/1x16A, or 1x16A/1x16A/1x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b> .....	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features (Optional)</b> .....	SmartTub™ Module, Exterior lights
<b>Audio System (Optional)</b> .....	BLUEWAVE® Spa Stereo System with Bluetooth capability and Aux 3.5 mm head-phone jack port; 4 premium speakers, a powered subwoofer




\*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-425

## Operation/Seat Depths

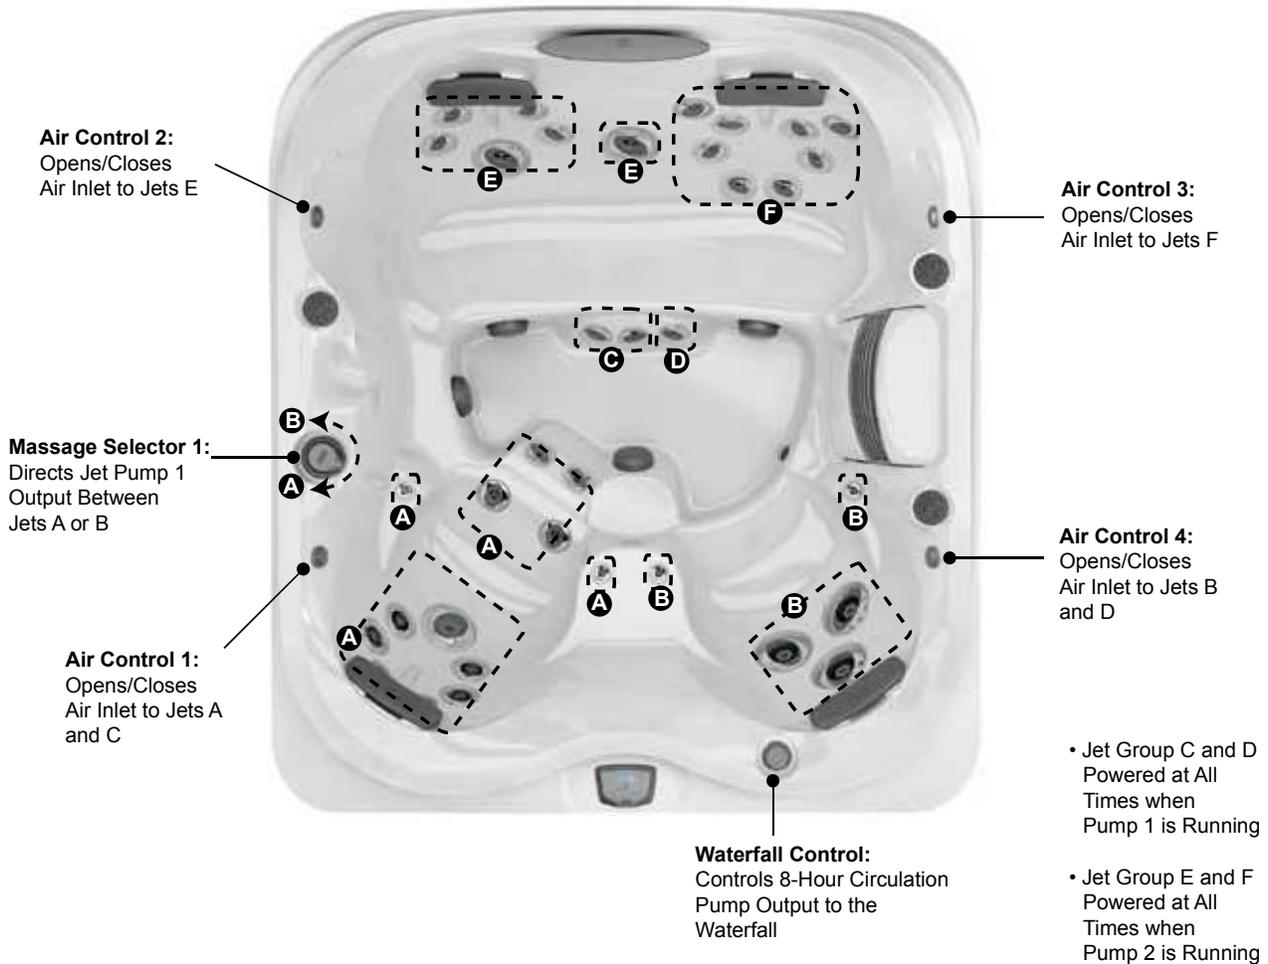

### 35 Total Jets



Spa Operation Subject to Change without Notice

## Seat Depths

**A = 27.00" (68.58 cm)**

**B = 28.00" (71.12 cm)**

**C = 28.00" (71.12 cm)**

**D = 27.00" (68.58 cm)**

**E = 16.75" (42.55 cm)**

**F = 31.25" (79.38 cm)**


Listed dimensions  
represent distance  
from top of acrylic to  
lowest point in seat.  
**Tolerance ± 0.5"**  
(1.27 cm).



Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-425

## Dimensions

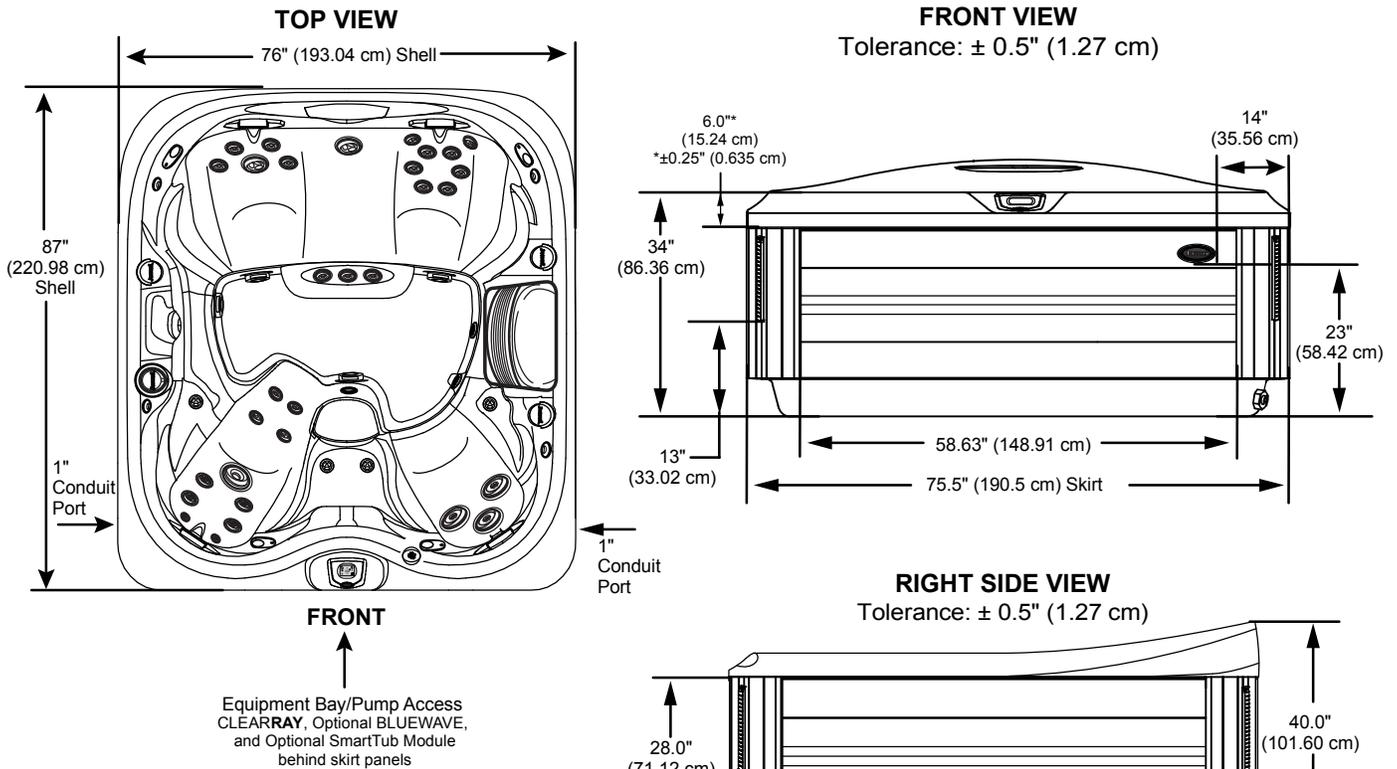


### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.



**IMPORTANT!**  
Always measure each hot tub for exact dimensions **BEFORE** designing its foundational support and/or decking.

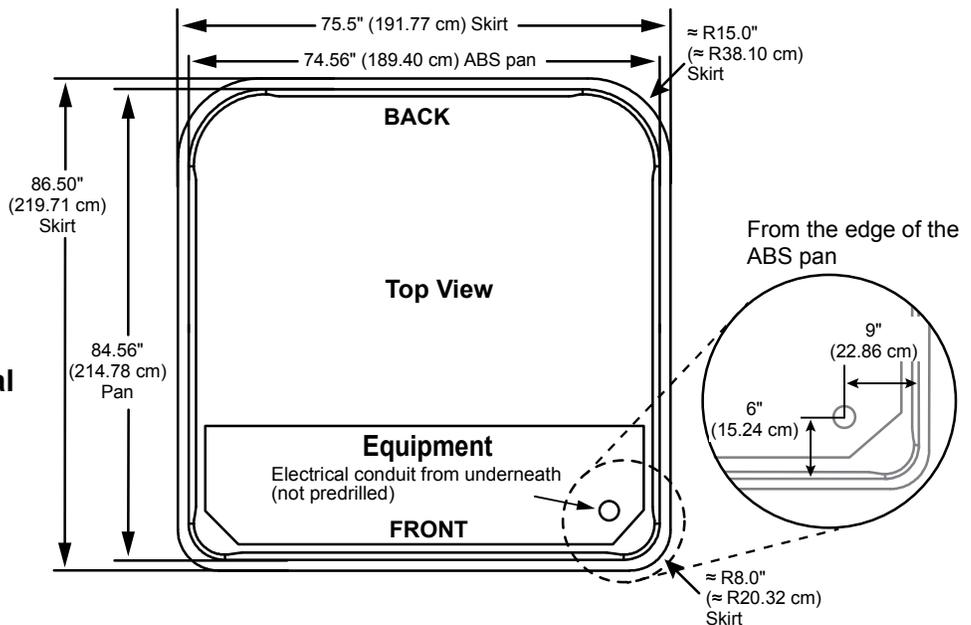

Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)