
# **Specifications**

Seating Capacity	6-7 Adults
Dimensions	
	(231.0 cm x 231.0 cm x 95.25 cm Front/107.0 cm
	Side);
	For complete dimensions, See page 100
Dry Weight	
Filled Weight (Spa Volume)	
Filled Weight (Average Fill)	
Water Capacity (Spa Volume)	
Water Capacity (Average Fill)	
Electronic Controls	ProTouch™ Glass user interface. Touch-screen
	LCD displays temperature, time, cycles and jet
	control. Offers customizing of filtration cycles,
	CLEARRAY on demand, cleaning cycles and water temperature setting.
	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
	1-Speed, 2.0 HP continuous
	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
	1-Speed, 2.0 HP continuous
Circulation Pump	
Total PowerPro® Jets	
	4 PowerPro® FX Rotational, 3 PowerPro® FX Large Rotational
	6 PowerPro® FX Rotational, 6 PowerPro® FX, 2 PowerPro® PX
	2 PowerPro® RX, 2 PowerPro® FX
	6 PowerPro® RX, 2 PowerPro® FX Directional
Seat F Jets	2 PowerPro® FX Large Rotational
Footwell (G) Massage Selectors	
Air Controls	
Water Management System	<del>-</del> One ProClarity® 40 ft² filter cartridge and 1 ProClarity® depth load filter on 8-hour
water wanagement System	circulation pump; one ProCatch® bag with ProClear® 60 ft filter; Floating Weir;
	Factory installed CLEARRAY® Water Purification System
Export (50 Hz):	Factory installed CLEARRAY® Water Purification System
	Exterior corner lights, ProEdge™ interior lighting, two waterfall lights, one footwell
Synthetic Cabinet Colors	
	Platinum, Silver Pearl (Gypsum), Monaco, Midnight, Sahara, Porcelain
Headrests	
Waterfalls	Two with independent flow rate (on or off) adjustment; powered by 8-hour circulation
	pump
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A, or 60A
	Export (50 Hz): 230-240 VAC@2x16A or suitably rated circuit breaker to comply
	with local electrical codes. Certain countries may require dual power inputs;
	two GFCI RCD breakers are required for this configuration.
Warranty*	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing
	Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets,
	2 Years Lights, 1 Year Stereo;
	Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing
	Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo
Special Features	…Factory installed SmartTub™ Module
	BLUEWAVE® Wireless Spa Stereo System with Aux 3.5 mm jack port and Bluetooth
Addio Oystelli (Optioliai)	capability; 4 single driver speakers and a powered subwoofer
	sapasing, i single anter speakers and a powered submodel

<sup>\*(</sup>See Warranty Document for Specific Details)

### **Operation/Seat Depths**

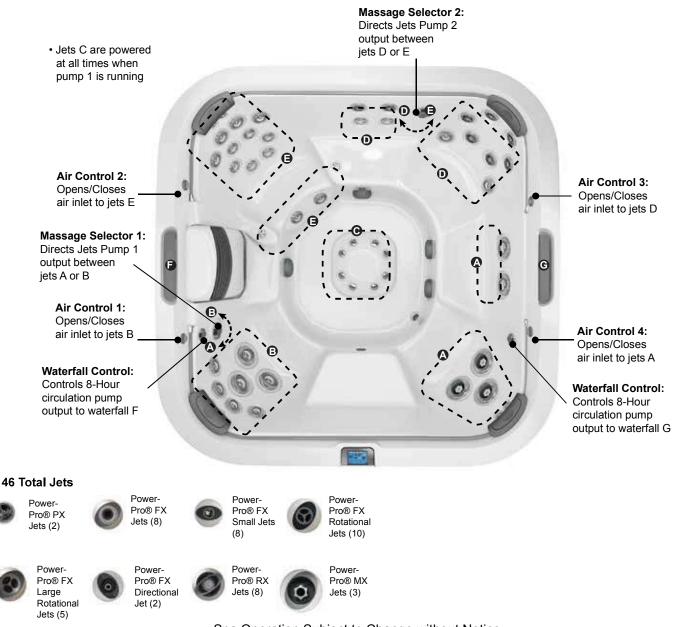

Spa Operation Subject to Change without Notice

### **Seat Depths**


A = 26.63" (67.64 cm) G = 24.50" (62.23 cm)
B = 21.00" (53.34 cm) H = 20.13" (51.13 cm)
C = 27.00" (68.58 cm) I = 33.00" (83.82 cm)
D = 20.00" (50.80 cm)
E = 23.00" (58.42 cm)

Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance ± 0.5" (1.27 cm).



F = 21.38" (54.31 cm)

#### **Dimensions**

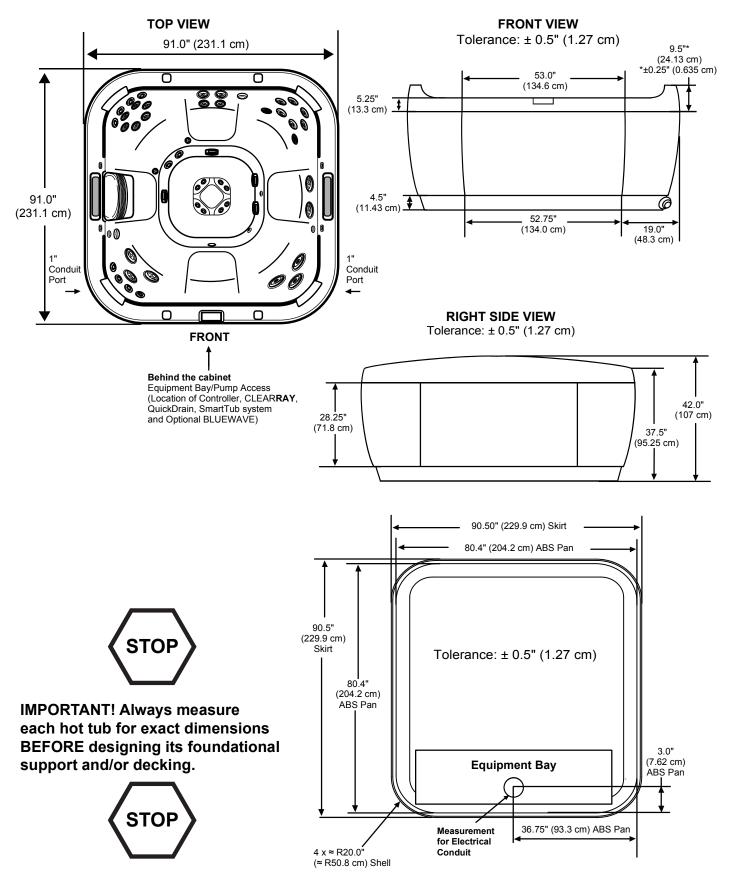


Dimensions/specifications subject to change without notice. Tolerance ±0.5" (1.27 cm)

# **Specifications**

Seating Capacity	5-6 Adults
Dimensions	
	(231.0 cm x 231.0 cm x 95.25 cm Front/107.0 cm Side);
	For complete dimensions, See page 100
Dry Weight	898 lbs (407 kg)
Filled Weight (Spa Volume)	5,446 lbs (2,470 kg)
Filled Weight (Average Fill)	
Water Capacity (Spa Volume)	
Water Capacity (Average Fill)	
Electronic Controls	ProTouch™ Glass user interface. Touch-screen LCD
	displays temperature, time, cycles and jet control. Offers
	customizing of filtration cycles, CLEARRAY® on demand, cleaning cycles and water
	temperature setting.
Pump 1	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
Export (50 Hz):	1-Speed, 2.0 HP continuous
	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
	1-Speed, 2.0 HP continuous
Circulation Pump	
Total PowerPro® Jets	49
Seat A Jets	6 PowerPro® FX Rotational, 6 PowerPro® FX
Seat B Jets	6 PowerPro® FX Rotational, 2 PowerPro® FX Large Rotational
Seat C Jets	6 PowerPro® RX, 2 PowerPro® FX directional, 8 PowerPro® PX, 2 PowerPro® FX
	Large Rotational
	2 PowerPro® FX Large Rotational
	3 PowerPro® MX, 2 PowerPro® NX2, 2 PowerPro® FX Rotational
Footwell (F)	
Massage Selectors	
Air Controls	4
Air Controls	4 One ProClarity® 40 ft <sup>²</sup> filter cartridge and 1 ProClarity® depth load filter on 8-hour
Air Controls	4 One ProClarity® 40 ft <sup>2</sup> filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft filter; Floating Weir;
Air Controls Water Management System	4One ProClarity® 40 ft <sup>2</sup> filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft filter; Floating Weir; Factory installed CLEAR <b>RAY</b> ® Water Purification System
Air Controls Water Management System  Export (50 Hz):	4One ProClarity® 40 ft <sup>2</sup> filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft <sup>2</sup> filter; Floating Weir; Factory installed CLEAR <b>RAY</b> ® Water Purification SystemFactory installed CLEAR <b>RAY</b> ® Water Purification System
Air Controls Water Management System  Export (50 Hz):	4One ProClarity® 40 ft <sup>2</sup> filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft filter; Floating Weir; Factory installed CLEARRAY® Water Purification SystemFactory installed CLEARRAY® Water Purification SystemExterior corners lights, ProEdge™ interior lighting, two waterfall lights, one footwell
Air Controls Water Management System  Export (50 Hz): LED Lighting	4One ProClarity® 40 ft <sup>2</sup> filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft filter; Floating Weir; Factory installed CLEARRAY® Water Purification SystemFactory installed CLEARRAY® Water Purification SystemExterior corners lights, ProEdge™ interior lighting, two waterfall lights, one footwell light
Air Controls  Water Management System  Export (50 Hz):  LED Lighting  Synthetic Cabinet Colors	4One ProClarity® 40 ft <sup>2</sup> filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft filter; Floating Weir; Factory installed CLEARRAY® Water Purification SystemFactory installed CLEARRAY® Water Purification SystemExterior corners lights, ProEdge™ interior lighting, two waterfall lights, one footwell lightSilverwood, Roasted Chestnut
Air Controls  Water Management System  Export (50 Hz):  LED Lighting  Synthetic Cabinet Colors  Acrylic Colors	4One ProClarity® 40 ft filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft filter; Floating Weir; Factory installed CLEARRAY® Water Purification SystemFactory installed CLEARRAY® Water Purification SystemExterior corners lights, ProEdge™ interior lighting, two waterfall lights, one footwell lightSilverwood, Roasted ChestnutPlatinum, Silver Pearl (Gypsum), Monaco, Midnight, Sahara, Porcelain
Air Controls Water Management System  Export (50 Hz): LED Lighting  Synthetic Cabinet Colors  Acrylic Colors  Headrests	4One ProClarity® 40 ft filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft filter; Floating Weir; Factory installed CLEARRAY® Water Purification SystemFactory installed CLEARRAY® Water Purification SystemExterior corners lights, ProEdge™ interior lighting, two waterfall lights, one footwell lightSilverwood, Roasted ChestnutPlatinum, Silver Pearl (Gypsum), Monaco, Midnight, Sahara, Porcelain4
Air Controls Water Management System  Export (50 Hz): LED Lighting  Synthetic Cabinet Colors  Acrylic Colors  Headrests	4One ProClarity® 40 ft² filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft filter; Floating Weir; Factory installed CLEARRAY® Water Purification SystemFactory installed CLEARRAY® Water Purification SystemExterior corners lights, ProEdge™ interior lighting, two waterfall lights, one footwell lightSilverwood, Roasted ChestnutPlatinum, Silver Pearl (Gypsum), Monaco, Midnight, Sahara, Porcelain4Two with independent flow rate (on or off) adjustment; powered by 8-hour circulation
Air Controls Water Management System  Export (50 Hz): LED Lighting  Synthetic Cabinet Colors  Acrylic Colors  Headrests Waterfalls	4One ProClarity® 40 ft² filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft filter; Floating Weir; Factory installed CLEARRAY® Water Purification SystemFactory installed CLEARRAY® Water Purification SystemExterior corners lights, ProEdge™ interior lighting, two waterfall lights, one footwell lightSilverwood, Roasted ChestnutPlatinum, Silver Pearl (Gypsum), Monaco, Midnight, Sahara, Porcelain4Two with independent flow rate (on or off) adjustment; powered by 8-hour circulation pump
Air Controls Water Management System  Export (50 Hz): LED Lighting  Synthetic Cabinet Colors  Acrylic Colors  Headrests	4One ProClarity® 40 ft <sup>2</sup> filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft filter; Floating Weir; Factory installed CLEARRAY® Water Purification SystemFactory installed CLEARRAY® Water Purification SystemExterior corners lights, ProEdge™ interior lighting, two waterfall lights, one footwell lightSilverwood, Roasted ChestnutPlatinum, Silver Pearl (Gypsum), Monaco, Midnight, Sahara, Porcelain4Two with independent flow rate (on or off) adjustment; powered by 8-hour circulation pumpNorth America (60 Hz): 240 VAC@40A, 50A, or 60A
Air Controls Water Management System  Export (50 Hz): LED Lighting  Synthetic Cabinet Colors  Acrylic Colors  Headrests Waterfalls	4One ProClarity® 40 ft filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft filter; Floating Weir; Factory installed CLEARRAY® Water Purification SystemFactory installed CLEARRAY® Water Purification SystemExterior corners lights, ProEdge™ interior lighting, two waterfall lights, one footwell lightSilverwood, Roasted ChestnutPlatinum, Silver Pearl (Gypsum), Monaco, Midnight, Sahara, Porcelain4Two with independent flow rate (on or off) adjustment; powered by 8-hour circulation pumpNorth America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 230-240 VAC@2x16A or suitably rated circuit breaker to comply
Air Controls Water Management System  Export (50 Hz): LED Lighting  Synthetic Cabinet Colors  Acrylic Colors  Headrests Waterfalls	4One ProClarity® 40 ft² filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft filter; Floating Weir; Factory installed CLEARRAY® Water Purification SystemFactory installed CLEARRAY® Water Purification SystemExterior corners lights, ProEdge™ interior lighting, two waterfall lights, one footwell lightSilverwood, Roasted ChestnutPlatinum, Silver Pearl (Gypsum), Monaco, Midnight, Sahara, Porcelain4Two with independent flow rate (on or off) adjustment; powered by 8-hour circulation pumpNorth America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 230-240 VAC@2x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs;
Air Controls Water Management System  Export (50 Hz): LED Lighting  Synthetic Cabinet Colors Acrylic Colors Headrests Waterfalls  Electrical Requirements:	4One ProClarity® 40 ft² filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft filter; Floating Weir; Factory installed CLEARRAY® Water Purification SystemFactory installed CLEARRAY® Water Purification SystemExterior corners lights, ProEdge™ interior lighting, two waterfall lights, one footwell lightSilverwood, Roasted ChestnutPlatinum, Silver Pearl (Gypsum), Monaco, Midnight, Sahara, Porcelain4Two with independent flow rate (on or off) adjustment; powered by 8-hour circulation pumpNorth America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 230-240 VAC@2x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.
Air Controls Water Management System  Export (50 Hz): LED Lighting  Synthetic Cabinet Colors  Acrylic Colors  Headrests Waterfalls	4One ProClarity® 40 ft² filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft filter; Floating Weir; Factory installed CLEARRAY® Water Purification SystemFactory installed CLEARRAY® Water Purification SystemExterior corners lights, ProEdge™ interior lighting, two waterfall lights, one footwell lightSilverwood, Roasted ChestnutPlatinum, Silver Pearl (Gypsum), Monaco, Midnight, Sahara, Porcelain4Two with independent flow rate (on or off) adjustment; powered by 8-hour circulation pumpNorth America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 230-240 VAC@2x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configurationNorth America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing
Air Controls Water Management System  Export (50 Hz): LED Lighting  Synthetic Cabinet Colors Acrylic Colors Headrests Waterfalls  Electrical Requirements:	4One ProClarity® 40 ft² filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft² filter; Floating Weir; Factory installed CLEARRAY® Water Purification SystemFactory installed CLEARRAY® Water Purification SystemExterior corners lights, ProEdge™ interior lighting, two waterfall lights, one footwell lightSilverwood, Roasted ChestnutPlatinum, Silver Pearl (Gypsum), Monaco, Midnight, Sahara, Porcelain4Two with independent flow rate (on or off) adjustment; powered by 8-hour circulation pumpNorth America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 230-240 VAC@2x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configurationNorth America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets,
Air Controls Water Management System  Export (50 Hz): LED Lighting  Synthetic Cabinet Colors Acrylic Colors Headrests Waterfalls  Electrical Requirements:	4One ProClarity® 40 ft² filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft² filter; Floating Weir; Factory installed CLEARRAY® Water Purification SystemFactory installed CLEARRAY® Water Purification SystemExterior corners lights, ProEdge™ interior lighting, two waterfall lights, one footwell lightSilverwood, Roasted ChestnutPlatinum, Silver Pearl (Gypsum), Monaco, Midnight, Sahara, Porcelain4Two with independent flow rate (on or off) adjustment; powered by 8-hour circulation pumpNorth America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 230-240 VAC@2x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configurationNorth America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo;
Air Controls Water Management System  Export (50 Hz): LED Lighting  Synthetic Cabinet Colors Acrylic Colors Headrests Waterfalls  Electrical Requirements:	4One ProClarity® 40 ft² filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft² filter; Floating Weir; Factory installed CLEARRAY® Water Purification SystemFactory installed CLEARRAY® Water Purification SystemExterior corners lights, ProEdge™ interior lighting, two waterfall lights, one footwell lightSilverwood, Roasted ChestnutPlatinum, Silver Pearl (Gypsum), Monaco, Midnight, Sahara, Porcelain4Two with independent flow rate (on or off) adjustment; powered by 8-hour circulation pumpNorth America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 230-240 VAC@2x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configurationNorth America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing
Air Controls Water Management System  Export (50 Hz): LED Lighting  Synthetic Cabinet Colors Acrylic Colors Headrests Waterfalls  Electrical Requirements:	4One ProClarity® 40 ft² filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft² filter; Floating Weir; Factory installed CLEARRAY® Water Purification SystemFactory installed CLEARRAY® Water Purification SystemExterior corners lights, ProEdge™ interior lighting, two waterfall lights, one footwell lightSilverwood, Roasted ChestnutPlatinum, Silver Pearl (Gypsum), Monaco, Midnight, Sahara, Porcelain4Two with independent flow rate (on or off) adjustment; powered by 8-hour circulation pumpNorth America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 230-240 VAC@2x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configurationNorth America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Plumbing Component Leaks, 5 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet,
Air Controls Water Management System  Export (50 Hz): LED Lighting  Synthetic Cabinet Colors Acrylic Colors Headrests Waterfalls  Electrical Requirements:  Warranty*	4One ProClarity® 40 ft² filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft filter; Floating Weir; Factory installed CLEARRAY® Water Purification SystemFactory installed CLEARRAY® Water Purification SystemExterior corners lights, ProEdge™ interior lighting, two waterfall lights, one footwell lightSilverwood, Roasted ChestnutPlatinum, Silver Pearl (Gypsum), Monaco, Midnight, Sahara, Porcelain4Two with independent flow rate (on or off) adjustment; powered by 8-hour circulation pumpNorth America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 230-240 VAC@2x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configurationNorth America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Lights, 2 Years Lights, 2 Years Stereo
Air Controls Water Management System  Export (50 Hz): LED Lighting  Synthetic Cabinet Colors Acrylic Colors Headrests Waterfalls  Electrical Requirements:  Warranty*  Special Features	4One ProClarity® 40 ft² filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft² filter; Floating Weir; Factory installed CLEARRAY® Water Purification SystemFactory installed CLEARRAY® Water Purification SystemExterior corners lights, ProEdge™ interior lighting, two waterfall lights, one footwell lightSilverwood, Roasted ChestnutPlatinum, Silver Pearl (Gypsum), Monaco, Midnight, Sahara, Porcelain4Two with independent flow rate (on or off) adjustment; powered by 8-hour circulation pumpNorth America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 230-240 VAC@2x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configurationNorth America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Jets, 2 Years Lights, 2 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Jets, 2 Years Lights, 2 Years StereoFactory installed SmartTub™ Module
Air Controls Water Management System  Export (50 Hz): LED Lighting  Synthetic Cabinet Colors Acrylic Colors Headrests Waterfalls  Electrical Requirements:  Warranty*  Special Features	4One ProClarity® 40 ft² filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft filter; Floating Weir; Factory installed CLEARRAY® Water Purification SystemFactory installed CLEARRAY® Water Purification SystemExterior corners lights, ProEdge™ interior lighting, two waterfall lights, one footwell lightSilverwood, Roasted ChestnutPlatinum, Silver Pearl (Gypsum), Monaco, Midnight, Sahara, Porcelain4Two with independent flow rate (on or off) adjustment; powered by 8-hour circulation pumpNorth America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 230-240 VAC@2x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configurationNorth America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Lights, 2 Years Lights, 2 Years Stereo


## **Operation/Seat Depths**

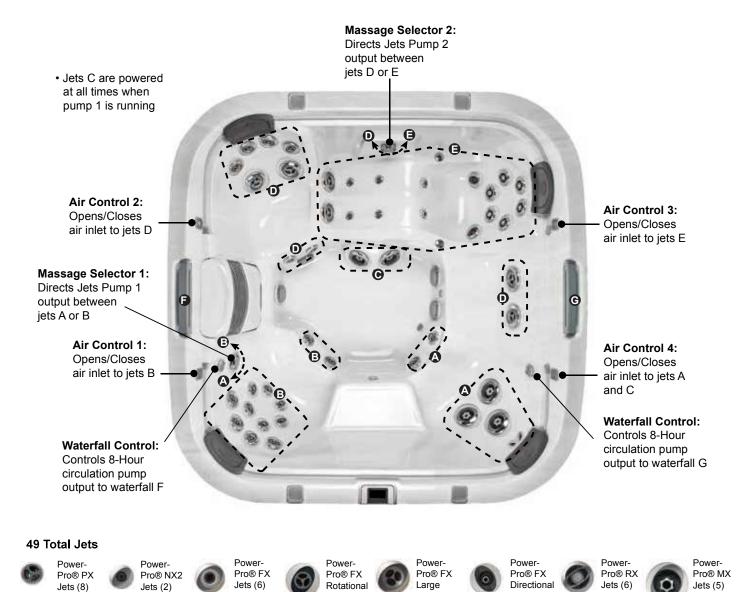

Spa Operation Subject to Change without Notice

Jets (14)

### **Seat Depths**




Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance ± 0.5" (1.27 cm).

Rotational


Jets (6)

Jet (2)



F = 18.25" (46.36 cm)

#### **Dimensions**

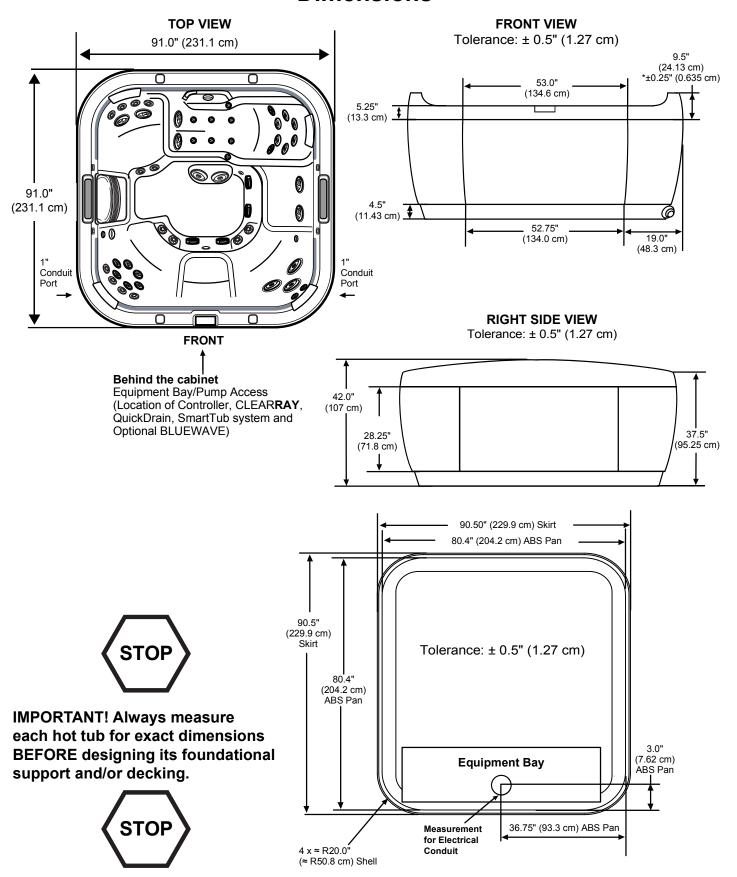

Dimensions/specifications subject to change without notice. Tolerance ±0.5" (1.27 cm)