


Jacuzzi J-235

Specifications

Seating Capacity	5-6 Adults
Dimensions	84" x 84" x 36" (214 cm x 214 cm x 92 cm); For Complete Dimensions, See page 76
Dry Weight	726 lbs (330 kg)
Filled Weight (Average Fill)	3,728 lbs (1,692 kg)
Water Capacity (Average Fill)	360 US gallons (1,363 Liters)
Electronic Controls	Solid state electronic controls with LED readout, programmable temperature, filtration, and heat cycles
Pump 1	North America (60 Hz): 2-Speed, 4.5 HP brake, 2.5 HP continuous, 56 Frame Export (50 Hz): 2-Speed, 2.0 HP continuous
Pump 2	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame Export (50 Hz): 1-Speed, 2.0 HP continuous
Circulation Pump	No
Total Jets	34
Seat A Jets	4 SL3R Rotational, 2 SL5R Rotational
Seat B Jets	2 SL3R Rotational
Seat C Jets	2 SLR Rotational, 2 SL Directional, 8 SL3 Directional
Seat D Jet	1 SL3R Rotational
Seat E Jets	2 SLR Rotational, 8 SL Directional, 1 SL3 Directional
Footwell (G)	2 SL3 Directional
Massage Selectors	None
Air Controls	2
Water Management System	One 50 ft ² filter cartridge on jets pump 1, ClearRay Active Oxygen® System Export (50 Hz): ClearRay Active Oxygen® System
LED Lighting	LED Lighting System (Interior Surround); Standard Exterior Light
Cabinet Colors	Horizon Gray, Pecan
Acrylic Colors	Platinum, Silver Pearl, Morning Mist, Midnight, Canyon, Monaco (while quantities last)
Headrests	3
Waterfall	One independent flow rate (on or off) adjustment; powered by the pump 1
Heater:	North America (60 Hz): 5.5 kW, High Flow Export (50 Hz): High Flow, 2.7 kW
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A or 60A Export (50 Hz): 220-240 VAC@1x16A, 1x32A or 2 out of 3-phase (see manual) or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.
Warranty*	North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls; 1 Year Cabinet, 1 Year Jets Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets
Special Features (Optional)	SmartTub® Module
Audio System (Optional)	N/A

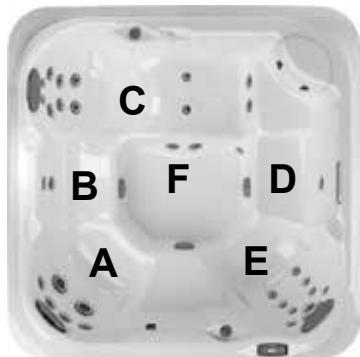

Jacuzzi J-235

Operation/Seat Depths



Group A Jets are
always on when
Pump 1 is running.

Group B Jets are
always on when
Pump 2 is running.

34 Total Jets



SL Jets (6)



SLR Jets (8)



SL3 Jets (11)



SL3R Jets (7)



SL5R Jets (2)

Spa Operation Subject to Change without Notice

Seat Depths

A = 23.25" (59.06 cm)

B = 20.75" (52.71 cm)

C = 24.88" (63.18 cm)

D = 25.50" (64.77 cm)

E = 17.50" (44.45 cm)

F = 21.50" (54.61 cm)


G = 25.63" (65.09 cm)

H = 17.00" (43.18 cm)

I = 30.00" (76.20 cm)

listed dimensions


represent distance from
top of acrylic to lowest
point in seat. Tolerance
± 0.5" (1.27 cm).

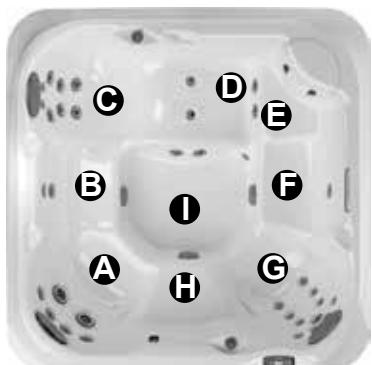

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-235


Dimensions

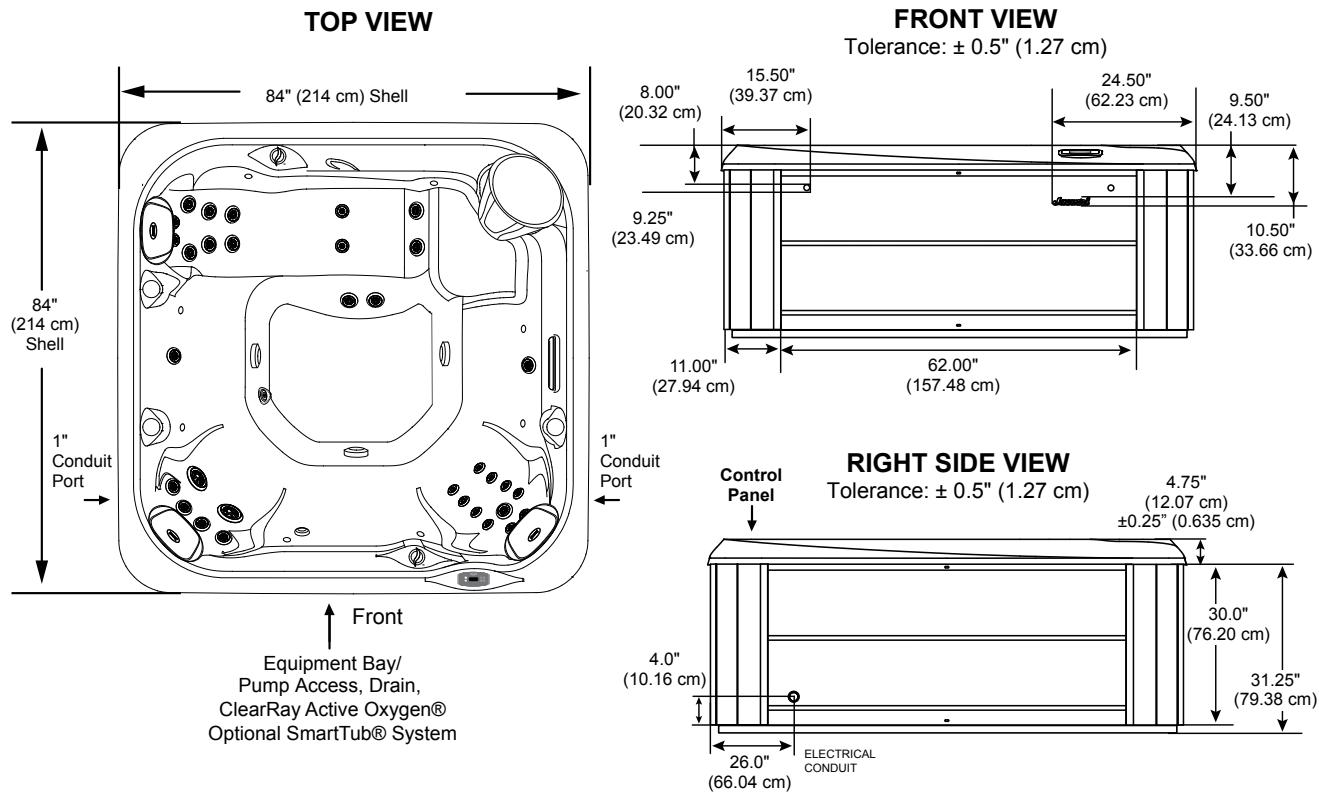

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.



Cabinet Radius:
≈ 9.0" (22.86 cm)

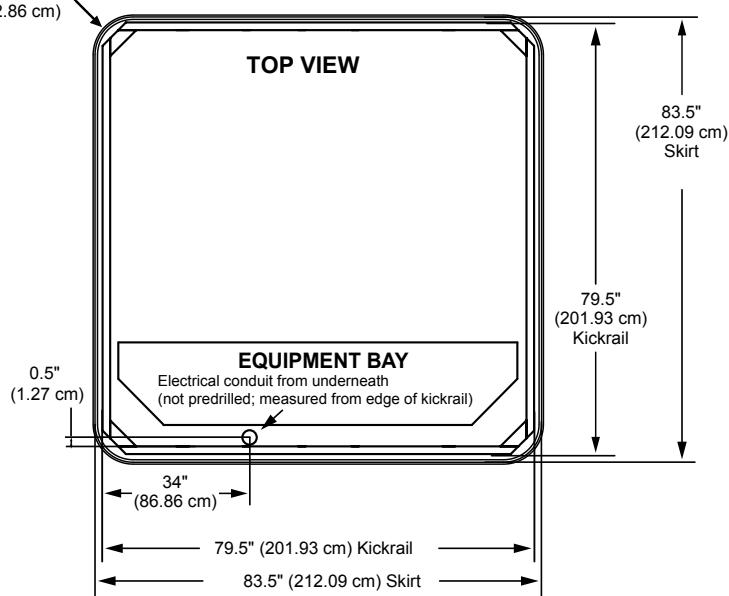

Dimensions/specifications subject to change without notice. Tolerance: ± 0.5" (1.27 cm)

Dimensions/specifications subject to change without notice. Tolerance ±0.5" (1.27 cm)