

Jacuzzi J-375

Specifications


Seating Capacity.....	5-6 Adults
Dimensions	91" x 91" x 37.50" (232 cm x 232 cm x 96 cm); For complete dimensions, see page 75
Dry Weight.....	830 lbs (376 kg)
Filled Weight (Average Fill)	4,541 lbs (2,060 kg)
Water Capacity (Average Fill).....	445 US gallons (1,685 Liters)
Electronic Controls	Solid state electronic touchscreen controls, programmable temperature, filtration, and heat cycles
Pump 1.....	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame
Export (50 Hz):.....	1-Speed, 2.0 HP continuous
Pump 2.....	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame
Export (50 Hz):.....	1-Speed, 2.0 HP continuous
Circulation Pump.....	Yes, 8-hour
Heater	North America (60 Hz): 5.5kW High Flow
Export (50 Hz).....	2.7kW High Flow
Total Jacuzzi® PowerPro® Jets.....	52
Seat A Jets	2 Jacuzzi® PowerPro® NX2, 2 Jacuzzi® PowerPro® FX Large, 2 Jacuzzi® PowerPro® FX Rotational,
	2 Jacuzzi® PowerPro® FX
Seat B Jets	4 Jacuzzi® PowerPro® FX, 2 Jacuzzi® PowerPro® FX Large Rotational,
	12 Jacuzzi® PowerPro® BX,
	2 Jacuzzi® PowerPro® FX Rotational
Seat C Jets	1 Jacuzzi® PowerPro® FX Large Rotational
Seat D Jets (Standard model).....	10 Jacuzzi® PowerPro® FX, 2 Jacuzzi® PowerPro® FX Rotational
Seat D Jets (optional IR Therapy)	8 Jacuzzi® PowerPro® FX, 2 IR Therapy Lights, 2 Jacuzzi® PowerPro® FX Rotational
Seat D HYDROSOOTHE™ Jets	2 Jacuzzi® PowerPro® FX Directional with independent flow rate valve
Seat E Jets	2 Jacuzzi® PowerPro® NX2, 3 Jacuzzi® PowerPro® MX, 2 Jacuzzi® PowerPro® FX
Footwell (F)	2 Jacuzzi® PowerPro® MX
Massage Selectors	2
Air Controls.....	4, On/Off rocker switch air controller
Water Management System.....	Two 60 ft² Filter cartridges; filter 1 on 8-hour circulation pump; filter 2 on jets pump 1; Factory installed ClearRay Active Oxygen® System; Optional True Water® System
Export (50 Hz):.....	ClearRay Active Oxygen® System
LED Lighting	One underwater prolite with 4 color modes, one colored waterfall light, cup holders, 2 HYDROSOOTHE pillow lights, and exterior lights
ProFinish™ Cabinet Colors.....	Modern Hardwood, Brushed Gray, and Smoked Ebony
Acrylic Colors	Platinum, Silver Pearl, Morning Mist, Midnight, Canyon, Monaco (while quantities last)
Headrests	4
Waterfalls	One independent flow rate (on or off) adjustment; powered by the circulation pump
Heater:.....	North America (60 Hz): 5.5 kW, High Flow
Export (50 Hz):	High Flow, 2.7 kW
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 220-240 VAC@1x32A, 1x20A/1x16A, 3x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.
Warranty*.....	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo
Special Features (Standard).....	SmartTub® Module
Export (50 Hz) (Optional):.....	SmartTub® Module
Special Features (Optional).....	2 IR Therapy Lights
Audio System (Optional).....	BLUEWAVE® Spa Stereo System (Bluetooth/Aux compatible) with four speakers and subwoofer



Shown with the optional IR Therapy Lights

Jacuzzi J-375

Operation/Seat Depths

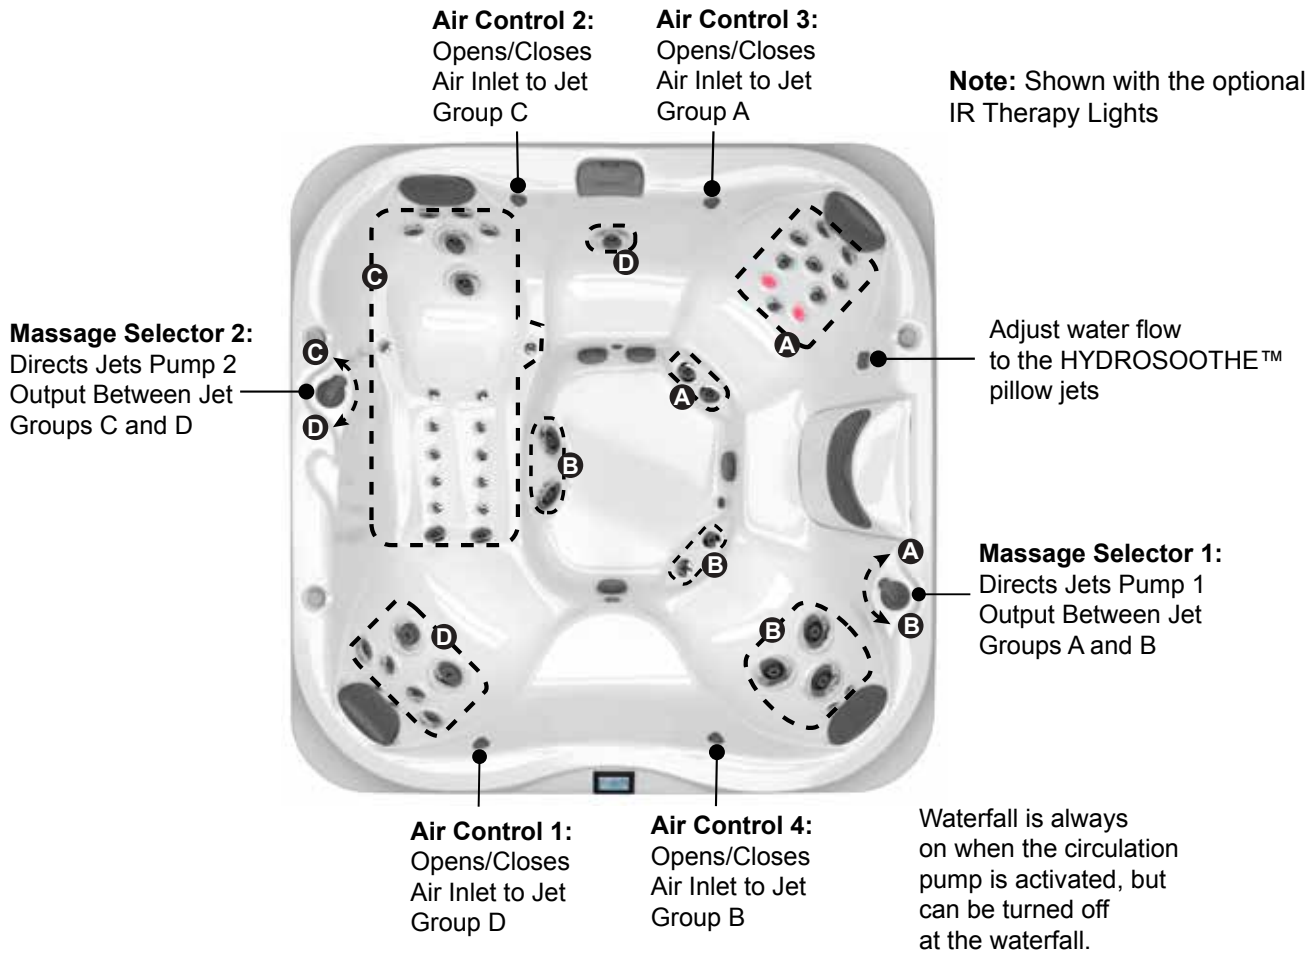

52 Total Jets



Spa Operation Subject to Change without Notice

Seat Depths

A = 26.50" (67.31 cm)
B = 27.50" (69.85 cm)
C = 23.50" (59.69 cm)
D = 28.25" (71.76 cm)
E = 27.25" (69.22 cm)

F = 17.00" (43.18 cm)
G = 34.00" (86.36 cm)

Listed dimensions
represent distance
from top of acrylic to
lowest point in seat.
Tolerance $\pm 0.5"$
(1.27 cm).




Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-375

Dimensions

TOP VIEW

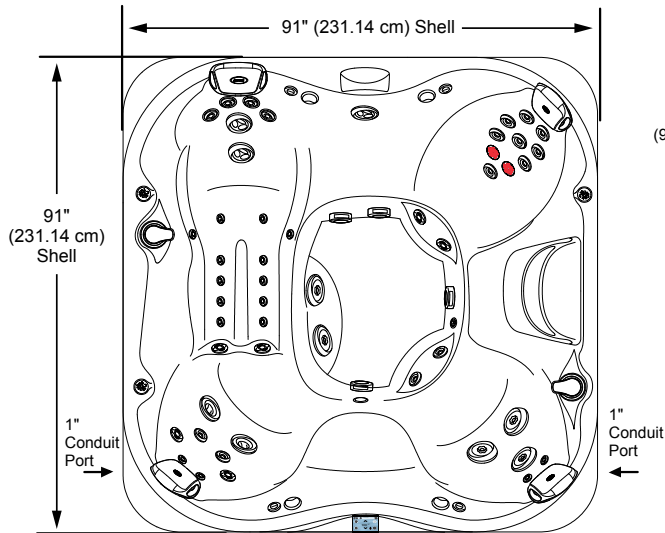


FRONT

Equipment Bay/Pump Access
ClearRay Active Oxygen,
Optional BLUEWAVE,
and Optional SmartTub Module
behind skirt panels


FRONT/BACK VIEW

Tolerance: $\pm 0.5"$ (1.27 cm)

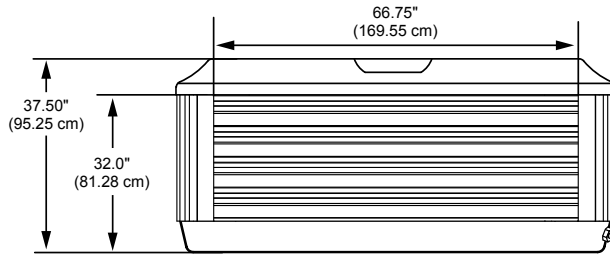

LEFT SIDE VIEW


Tolerance: $\pm 0.5"$ (1.27 cm)

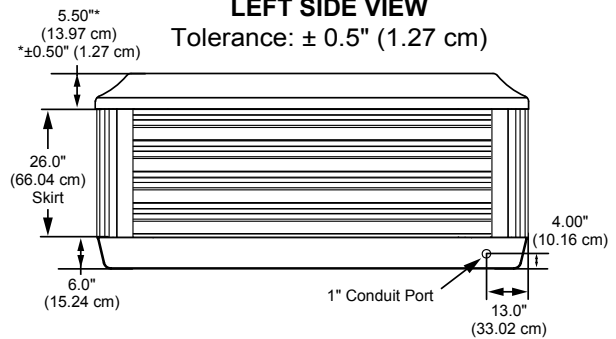

STOP

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

STOP

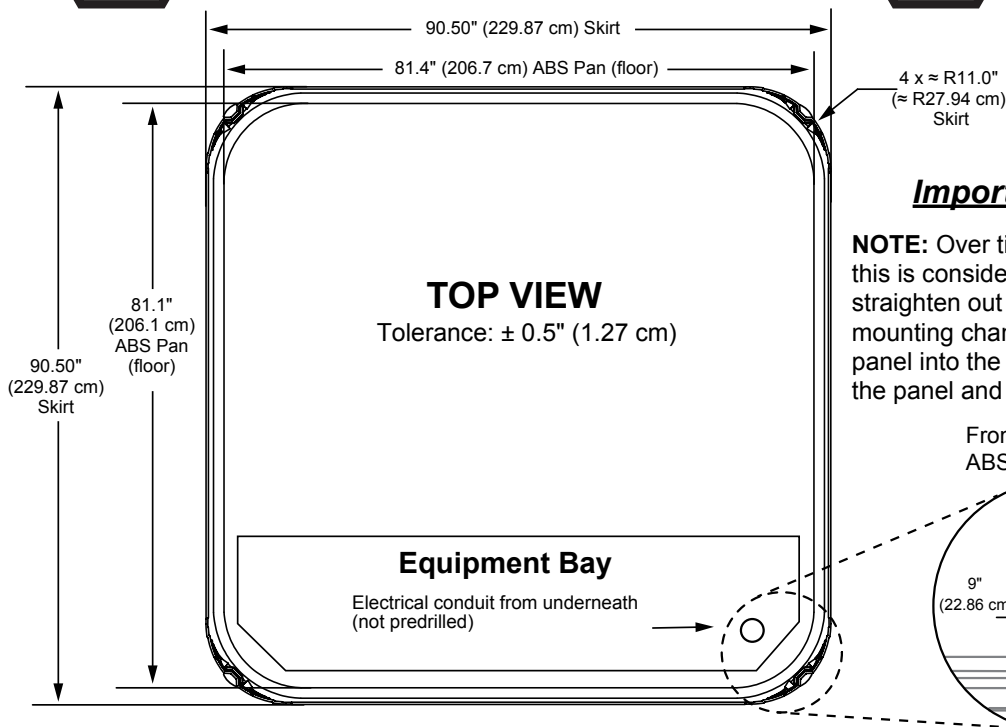

TOP VIEW

Tolerance: $\pm 0.5"$ (1.27 cm)


Equipment Bay

Electrical conduit from underneath
(not predrilled)

Important Panel Details

NOTE: Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

From the edge of the
ABS pan



Dimensions/specifications subject to change without notice. Tolerance $\pm 0.5"$ (1.27 cm)